



	ABOUT RUBI GROUP	
	Introduction	04-05
	ELECTRIC TILE CUTTING	
	Electric Cutting and Mitering Saws	
<u></u>	DIAMOND BLADES	
	Diamond blades (dry & wet cut)	18-21
	CUTTING & GRINDING	
	Grinding wheels and blades	
	MANUAL TILE CUTTING	
	Manual Tile Cutters	
	SLAB SYSTEM. Cutting and handling tools for large tiles.	
	Cutting Handling Suction Cups	43-45
A CONTRACTOR OF THE PROPERTY O	MIXING	
	Electric Mixers	









The year 1951 marked a milestone in the Spanish construction industry, when the young Boada brothers invented the professional manual cutter for hydraulic mosaic. This ground-breaking tool, christened with the name of RUBI, served as the stepping stone for developing Germans Boada, S.A. Currently, this multinational company designs, manufactures and distributes best-seller equipment and tools for cutting and laying tiles.

The group headquarters are located in Rubi, near Barcelona, and the logistics and industrial center is established in Santa Oliva (Tarragona). The productive and logistics center, recently expanded to 220.000 Sqf., counts on an automated warehouse and the latest technology in order management. These facilities and resources, combined with optimal inventory management, guarantee a daily service to major markets with tight deadlines, satisfying the current needs multiple distribution channels worldwide. Its international vocation, very present since its creation, makes Germans Boada S.A. a global company with a presence in over 100 countries through an extensive network of branches and participated companies.

In 1999, due to the increasing satisfaction of thousands of tile installers worldwide, RUBI Tools USA opened its doors to the most ambitious and skilled construction professionals in the United States. Strictly committed to its customers and distributors, the company is currently considered the leader manufacturer of tile laying equipment and related building tools in North America.

RUBI Tools USA is heavily investing in the future of the tile industry. The company recognizes that in order to become a top influencer in the construction field, it has to be solidly pledged to the latest technology trends. Accordingly, RUBI Tools USA offers cutting edge tile tools with an unparalleled level of guarantee. Beyond history, sales or technology, the success of RUBI Tools USA is rooted in a team of specialists and customer representatives who are always ready to face any kind of challenge. The team is also actively participating in the social conversation, monitoring what thousands of tile experts or knowledge seekers have to say about the brand. To stay tuned for the latest updates, events, and offers, visit us on Facebook, Twitter, YouTube and our blog Tiling World.







 \odot

DC-250 ZERO DUST



Dynamic cutter with maximum functionality.
For all types of ceramic and porcelain tiles and other materials.



- Equipped with ZERO DUST system. Tested and certified by TNO (Organisation for Applied Scientific Research).
- 2 DC-250 1200, chassis with anti-corrosion treatment.
- With adjustable rule (0 to 60°) and lateral stop.
- 4 Plunge effect allowing adjustment to cutting height.
- · Extruded aluminium tables, removable for easy cleaning of the machine.
- Single phase direct drive motor, 1.1 kW (1.5 hp) with thermal protector.
- · Water pump refrigation of blade with flow control.
- · High structural rigidity in chassis.
- · Mobile head on bearings and foldable at 45 ° for miter cuts.
- · Includes diamond disc ARROWHEAD 010".
- · Machine supplied with cable.
- · Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

INCLUDED!



Ref. 31900 Arrowhead 10"

























The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.

	REF.	55948
DC-250 1200	Voltage	120V-60 Hz.
ZERO DUST	RPM	2790
	REF.	54924
DC-250 850 7FRO DUST	Voltage	120V-60 Hz.
ZERU DUSI	RPM	2790




XX

DCX-250 XPERT

Professional moving head machine for wet cutting with plunge effect. Suitable for intensive cutting of porcelain, stoneware and ceramic tile. For occasional cutting of natural stone such as marble or granite.









- 3 New adjustable cooling system. Increases cooling efficiency and reduces water dispersion.
- 4 High performance plunge effect. Cutting height adjustment.
- · Includes transport handle and off-road type reinforced wheels, which provide better transportability and handling of the machine.
- · Steel double settling system for improved efficiency and water
- · Angular measurement with aluminium square adjustable from 0° to 60° for repetitive cuts.
- · Includes reinforced folding legs with folding-prevention system and quick lock.
- · External and easy to remove water tank with 30 L capacity.
- · Includes improved splash guard system with auto-sliding protective cover.
- · Patented ZERO DUST system exclusive to RUBI certified by the TNO, for safe exposure thanks to the reduction of the breathable dust particles generated during the cut.
- · Ergonomic bi-material handle for comfortable operation of the cutting head.
- · Earth integrated into the chassis. .

























	69			\Rightarrow	\odot	Ø	Å		
DCX-250 XPERT 1250	49 3/16"	35 7/16x35 7/16'	2 3/8 / 3 9/16"	1 15/16"	1"	10"	172 Lb	1	1**
DCX-250 XPERT 1550	61 1/16"	43 5/16x43 5/16'	' 2 3/8 / 3 9/16"	1 15/16"	1"	10"	190 Lb	1	1**

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

	REF	52962
DCX-250 XPERT 1250	Voltage	120V-60Hz.
	RPM	3350
	REF	52972
DCX-250 XPERT 1550	Voltage	120V-60Hz.
1220	RPM	3350

























 \odot

DX-250 PLUS LASER&LEVEL ZERO DUST



Heavy Duty 10" Bridge Saw with Plunge cut. For Porcelain, Ceramic, Stone Tiles and other materials.



- Powerful 2hp belt driven rail saw.
- Set sliding motor on bearings of high precision and reliability. Perfect finishes.
- Equipped with ZERO DUST system. Tested and certified by TNO (Organisation for Applied Scientific Research).
- 4 High performance plunge effect. Maximum cutting height.
- Mobile head foldable at 45 ° for miter cuts.
- Aluminum structure. Lighter and maximum resistance to hard working conditions.
- With thermal protection and overcurrent
- · Water pump refrigeration of blade.
- Premium Continuous 10" included.
- Adjustable head with plunge effect.
- Cable included.
- 2mW (milliwatt) line laser for precise cut.
- · With guide for repetitive cuts.

INCLUDED!



Ref. 31961 RED COBRA 10"























	69			0	Ø			
DX-250 PLUS 1000 LASER&LEVEL ZERO DUST	44"	31"x31"	2 3/4"/5 1/2"	5/8"	10"	168 Lb	1	**1
DX-250 PLUS 1400 LASER&LEVEL ZERO DUST	60"	42"x42"	2 3/4"/5 1/2"	5/8"	10"	192 Lb	1	**1

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

		REF.	52950
	DX-250 PLUS 1000	Voltage	120v-60HZ
		RPM	3400
		REF.	52951
	DX-250 PLUS 1400	Voltage	120v-60HZ
		RPM	3400



XX

DS-250 N LASER & LEVEL ZERO DUST



Mobile head machine for high accuracy, ideal for miter cuts. For Wall tiles, Floor tiles, Porcelain tiles, Marble, Granite and other materials.

































	<u></u>			\Rightarrow	\otimes	Ø	3	Å	*		
DS-250 N 1300 LASER&LEVEL ZERO DUST	52"	37"	2"	1"	1"	10"	78x33 7/8x50"	212.7 Lb	265 Lb	1	**1
DS-250 N 1500 LASER&LEVEL ZERO DUST	60"	42"	2"	1"	1"	10"	86 5/8x33 7/8x50"	220 Lb	276 Lb	1	**1

Cutting capabilities may vary depending on the head position, special plates and disc diameter.

- Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- 2 Equipped with ZERO DUST system. Tested and certified by TNO (Organisation for Applied Scientific Research).
- Wheels and handle included. Easy transport.
- 4 Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- · Removable aluminium tables for easy cleaning of the machine.
- · With thermic security switch.
- · Water pump refrigeration of blade with flow control valve.
- · Diamond blade 010" (250mm) not included.
- · With a double set of flanges, one especially designed for miter cuts.
- · Motor assembly mounted on sliding bearings for maximum accuracy miter cuts.
- · Safety protector for segmented blades.
- · With lateral stop for repetitive cuts.
- · Retractable legs with "shield" function and wheels for easy transportation.
- · Removable water tank system.
- · 2mW (milliwatt) line laser for precise cut.
- · Spirit level for easy field installation.
- · Blade Included.
- Machine supplied wit cable.
- · Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

INCLUDED!



Ref. 31961 RED COBRA 10"

DS-250 N 1300 LASER&LEVEL ZERO DUST	REF	52934	
	Voltage	120V-60 Hz.inch.	
	RPM	3400	
DS-250	REF	52944	52946
N 1500 LASER&LEVEL	Voltage	120V-60 Hz.Inch.	220V-60 Hz. Inch
ZERO DUST	RPM	3400	3400











##















DX-350 N LASER & LEVEL ZERO DUST



Mobile head machine with plunge effect for total versatility.

For all types of ceramic, porcelain tiles and building materials such as marble, granite, facade and fireproof bricks.





RUBI

 \odot































Cutting capabilities may vary depending on the head position, special plates and disc diameter.

- Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- 2 Equipped with ZERO DUST system. Tested and certified by TNO (Organisation for Applied Scientific Research).
- 3 Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- 4 High performance plunge effect. Maximum cutting height.
- · Equipped with protective safety system for segmented blades.
- · With thermal security switch.
- · Water pump refrigeration of blade with flow control valve.
- · Premium blade 0 12" (300 mm.) included.
- \cdot Allows the use of 0 12" and 14" blades.
- · Adjustable mobile head with plunge effect capability.
- · retractable legs with "shield" function and wheels for easy transportation.
- · Motor on top and belt transmission.
- · With lateral stop for repetitive cuts.
- · Aluminium working surface removable for easy cleaning.
- · Removable water tank system.
- 2mW line laser.
- · Circular level for easy field installation.
- · Machine supplied with cable.
- · Supplied with new ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

INCLUDED!



Ref. 31946 VIP TURBO MESH 12"

	DX-350	REF	52918
	N 1300 LASER&LEVEL ZERO DUST	Voltage	120V-60 Hz.Inch.
		RPM	3400



XX

DU-200 EVO



Mobile head cutter for renovations and light works. To cut ceramic and porcelain wall and floor tiles.



- Built-in foldable legs. Very easy to set up.
- 2 With wheels and handle for a more comfortable transport and handling.
- 3 External water tank, easy to handle and clean.
- 4 C³ System, improves blade's cleaning and cooling for a higher performance.
- · Motor assembly mounted on sliding bearings and foldable for
- · With lateral stop for repetitive cuts and adjustable square from
- · Direct drive motor with thermal protector and reinforced chassis.
- · Corrugated tube to protect power cable and water pipe.
- Equipped with C³ SYSTEM. The most effective cooling and cleaning system for blades. Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the material.
- · Bi-material handle, better ergonomics.
- · Model DU-200 EVO 650: With CEV-PRO type diamond disc Ø 8" [200 mm].
- · Model DU-200 EVO 850: With CEV-SUPERPRO diamond disc Ø 8" [200 mm].

























	69			\Rightarrow	0	\emptyset	8	\triangle		
DU-200 EVO 650	25 %16"	17 ¹¹ / ₁₆ ×17 ¹¹ / ₁₆ "	1 ⅓"	%"	1" & %"	8"	46 ¼6x15 ¾x40 ¾6"	51.8 Lb	1	9
DU-200 EVO 850	33 1/16"	24x24	1 ¾"	%"	1" & %"	8"	53 %ex15 %x40 %e"	60 Lb	1	6

The displayed product may not correspond exactly with the actual model.

	REF	55907
DU-200 EVO 650	Voltage	120V-60Hz. USA
	RPM	3200
	REF	54976
DU-200 EVO 850	Voltage	120V-60Hz. USA
EAO 070	RPM	3490











##













DT-10IN MAX



RUBI \odot

The DT 10in MAX is a portable over-head electric wet saw and is designed to handle professional tile jobs. This powerful tile saw is recommended for cutting ceramic, porcelain, stone, and glass tile.









11 36 inch rip and 25 inch square tile on

2 Powerful 15 amp motor to cleanly cut

3 Advanced water spray system includes the Rubi Zero Dust water spray capture system to bring the finest water particles back to the tank and keep the work area clean 4 Machined aluminum table with overmold glides along a patented rail system with the

through the toughest tile

with ease

diagonal will allow users to manage large tile

- to extend pump life and provide cleaner water to the blade.
- The Python cooling system's adjustable height brings water directly to the cut for improved blade cooling and a cleaner cut.
- Adjustable laser guide enables fast alignment for custom diagonals, L-cuts, and non-through cuts by aligning the laser line with each mark for the cut.
- Quick-Set stand helps setup and breakdown the saw quickly while the 8 inch wheels provide mobility for the entire saw across the jobsite in one simple trip.
- Patented Python cooling system efficiently cools the blade.
- Patented rail design allows for fast table adjustments and help protect the table roller while cleaning the saw.
- Patented Easy-Ratchet stand locking system automatically locks stand in both operating and transport positions with an intuitive quick release for fast setup.
- The toolless arbor lock and onboard tool storage makes blade changing easy.

























Ref. 31900 Arrowhead 10'

	REF	26994
DT-10IN MAX	Voltage	120V-60 Hz.USA
	RPM	4000



××

ND 7IN MAX



Portable electric cutter.

Ideal for renovations and small tile jobs for cutting ceramic, porcelain, stone, and glass tile.



- Machined aluminum table with tilting right table for 22.5 ° and 45 ° miter cuts.
- 2 Self-aligning extruded aluminum fence with single action lever for fast setup of accurate and repetitive cuts.
- 3 Soft-Slip aluminum angle guide glides smoothly along the aluminium fence for 0° to 45° diagonal cuts.
- 4 Transparent splash guard provides a clear view of the blade and the line of cut for precision alignment.
- · Perfect for repairs and renovations. Ideal for indoor work.
- · Anti-splash system that keeps dry the work area by reducing splash production.
- · Detachable rear table support allows straight cuts up to 24" in
- · On-board tool storage for convenient blade changes.
- · Integrated carry handle for easy portability to work sites.
- Direct drive 1.0 HP induction motor with thermal protection.
- · Large water tank provides continuous water to cut to reduce dust and cool blade.
- · Tubular steel chassis with reinforced leg supports.
- · Premium laser-cut 7in. diamond blade included for fast and smooth cuts.

	W
1	4
10110	- 1







The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.









4		
1	птиптипт	
ı	2 1 0	
ı	mm	
1	inch	



					0	Ø	8	Å		
ND 7IN MAX	24"	13"	1 1/4"	7 ⁄8″		7"	23 x 19 ¾ x 10 ¾	27 Lb	1	20

					\sim	~				الاستان	
ND 7IN MAX	24"	13"	1 1/4"	7∕8 "		7"	23 x 19 ¾ x 10 ¾	27 Lb	1	20	

45986 120V-60 Hz.USA Voltage ND 7 IN MAX 3450

































 \odot

RUBI

Portable electric cutter.

Ideal for renovations and small tile jobs for cutting ceramic, porcelain, stone, and glass tile.



- Stainless steel table with tilting right table for 22.5 ° and 45 ° miter cuts
- 2 Extruded aluminum fence with single action lever for fast setup of accurate and repetitive cuts
- 3 Soft-Slip angle guide glides smoothly along the aluminium fence for 0° to 45° diagonal cuts.
- Transparent splash guard provides a clear view of the blade and the cut line for precision alignment.
- · Direct drive induction motor with thermal protection.
- · Premium laser-cut 7in. diamond blade included for fast and smooth cuts.
- · Non-slip feet for greater stability.
- · Tubular steel chassis.
- · Large water tank provides continuous water to cut to reduce dust and cool blade.

1	1
3/4 HP	l
	4

















The cutting capacities may vary depending on the position of the head, special flanges and disc diameter.





XX

	Name	Reference	Rip Cut	Diagonal	Blade	Arbor	Plunge cut	НР
	DU-200 EVO 650	54976	33"	24''	8"	1" & 5/8"	Ν	1,1 HP
	DU-200 EVO 850	54907	26''	18''	8''	1'' & 5/8''	Ν	1,1 HP
	DC-250 850 ZERO DUST	54923	38''	27''	10''	5/8''	Y	1,5 HP
	DC-250 1200 ZERO DUST	55948	48''	33''	10''	5/8''	Y	1,5 HP
	DCX-250 XPERT 1250	52962	49''	35''	10''	5/8''	Y	2 HP
P	DCX-250 XPERT 1550	52972	61''	43''	10''	5/8"	Y	2 HP
	DX-250 PLUS 1000 ZERO DUST	52950	44''	31''	10''	5/8"	Y	2 HP
	DX-250 PLUS 1400 ZERO DUST	52951	60''	42''	10''	5/8"	Y	2 HP
	DS-250 N 1300 ZERO DUST	52934	52"	37''	10''	1"	Ν	3 HP
	DS-250 N 1500 ZERO DUST	52944	60''	42''	10''	1"	Ν	3 HP
	DX-350 N 1300 ZERO DUST	52918	58''	41''	12-14''	1"	Y	3 HP
	DT-10IN MAX	26994	36''	25''	10''	5/8''	Y	15 Amps
	ND 7" MAX	45986	24"	13"	7''	5/8''	N/A	1 HP
	ND 7" READY	45985	20"	13"	7''	5/8''	N/A	3 / 4 HP







































- · Circular bubble level to facilitate proper positioning of the electric cutter.
- · Laser Tracer indicating the passage of the disc and facilitates placement of material.
- · Laser power: 2 mW (milliwatt).
- · Laser Class: 2.

	REF	
LASER & LEVEL KIT DV/DC/DS/DX	54999	1



- · Lateral Stop 19 11/16" (50cm).
- · Facilitates positioning of the tile, while reducing the percentage of errors.
- · Accessory adaptable to DW-250-NL (up to 2012).

	REF	
LATERAL STOP FOR DC/DS/DX	54822	1

Tile Fixer DV/DC/DS/DX









- · Allows the fixing of the tile during cutting, thus avoiding sudden movements.
- · Accessory adaptable to DV,DC,DS and DX series (up to 2009).

	REF	
TILE FIXER DV/DC/DS/DX	51916	1



- · Increases work surface for large format tiles. 23 5/8"[600x230mm].
- · Maximum weight: 22Lb, (10kg).
- · Available in several models.

	REF	
TABLE EXTENSION DS/DX (FROM 2014)	54991	1
TABLE EXTENSION DV/DC	54993	1

i

XX

Roller Table Extension





- With rollers to simplify movement of the tiles.
- · With adjustable foldable legs.
- Work surface 26 9/16"x22 5/8" (675x575mm) and maximum weight 154lb [77lke]
- · Installation on both sides of the machine.

	REF	
ROLLER TABLE EXTENSION DU/DC/DS/DX (FROM 2013)	51914	1



Adjustable length Lateral Stop DC/DS/DX





- · For fixing large format tiles.
- · Adjustable to the maximum length of electric cutter.
- · Tile is held laterally thus avoiding any movement.
- Especially suitable for blocking and execution of repetitive miter.

	REF	
ADJUSTABLE LENGTH LATERAL STOP DC/DS/DX	54844	1
AUJUSTABLE LENGTH LATERAL STUP UL/US/UX	54844	1







- · Great accuracy when making miters cuts.
- · Available in several models.

	REF	
SET OF FLANGES 0184MM DX-350	51915	1
SET OF FLANGES 0130MM DV/DC/DX-250	57991	1



























Premium VIP TURBO MESH WET



Premium RED COBRA DRY

































quality 5.0 speed 4.5

- · Recommended blade for cutting hard materials such as granite, rustic tiles, dekton, clinker, refractory, slate and porcelain tile.
- · The turbo mesh design of the diamond band offers greater cutting speed on hard materials without sacrificing finish
- · 5/8" ring adapter included.
- · Thicker center to avoid vibrations and wobbling.

	REF		0	Ø		(
VIP TURBO MESH DRY		1	<i>(</i> .!!	5/8" & 7/8"	1/ "	3/8"	
4" USA	31926	1	4	78 & 78	716	78	
VIP TURBO MESH DRY 4	31927	1	/, 1 / h"	5/a" & 7/a"	1/ "	3/8"	
1/2" USA	31727	1	4 1/ 2	78 6.78	716	78	
VIP TURBO MESH DRY	71040	1	5"	5/ " C 7/ "	1/ "	3/ !!	
5" USA	31949	1	5	%" & %"	716	3/8"	

EXTRA LONG **LIFE**





quality 5.0 **** speed 4.5

- · Recommended blade for cutting hard materials such as granite, rustic tiles, dekton, clinker, refractory, slate and porcelain tile.
- · The turbo mesh design of the diamond band offers greater cutting speed on hard materials without sacrificing finish quality.
- · 5/8" ring adapter included.
- · Thicker center to avoid vibrations and wobbling.

	REF		\oslash	\bigcirc	<u>ب</u>	٥
VIP TURBO MESH WET	31929	1	7"	5%" &	1/16"	3/8"
7" USA	31727	1	/	7/8"	716	78
VIP TURBO MESH WET	31940	1	8"	5⁄8" £ 1"	1/16"	3/8"
8" USA	31740	1	0	/8 Q.I	/16	/8
VIP TURBO MESH WET	31941	1	10"	%" & 1"	1/16"	3/8"
10" USA	31741	1	10	/8 Q.I	/16	/8
VIP TURBO MESH WET	31946	1	12"	1"	1/16"	3/8"
12" USA	31740	1	12	1	/16	78
VIP TURBO MESH WET	31947	1	14"	1"	1/8"	3/8"
14" USA	3174/	1	14	1	78	78



· Recommended blade to cut Porcelain, Ceramic, Marble, Granite, Natural Stone.

speed 5.0

· 5/8" ring adapter included.

	REF		0	0	Φ	(6)
RED COBRA DRY 4" USA	31950	1	4"	5/8" & 7/8"	1/16"	1/4"
RED COBRA DRY 4 1/2" USA	31951	1	4 1/2"	5/8" & 7/8"	1/16"	1/4"

Premium RED COBRA WET



Premium BLADE THICKER WET





quality 5.0 ****
speed 4.5 ****

quality 5.0 ****
speed 5.0 ****
ref.31961

- Recommended blade to cut Porcelain, Ceramic, Glass, Marble, Granite, Natural Stone.
- · 5/8" ring adapter included.
- · Thicker center to avoid vibrations and wobbling.

	REF		Ø	Ø	٩	(
RED COBRA WET 7" USA	31960	1	7"	5/8" & 7/8"	1/16"	5/16"
RED COBRA WET 8" USA	30998	1	8"	5/8" & 1"	1/16"	5/16"
RED COBRA WET 10" USA	31961	1	10"	5/8" & 1"	1/16"	3/8"
RED COBRA WET 12" USA	30999	1	12"	1"	1/8"	3/8"



quality 5.0 ***** speed 5.0 *****

- For cutting all types of ceramic, porcelain and natural stone materials
- · For cutting thicknesses between 20mm (3/4") and 35mm (1-3/8")".
- · Joint by laser welding.
- · Extra-long life.
- Suitable for use on cutting tables and cut-off machines that incorporate guard systems in compliance with the standard for use of segmented blades.
- · Special bonded alloy that provides a good finish with a very fast cutting speed.

		REF	\otimes	\otimes	9	Ů
THICKER WET 10" USA	1	32962	10"	5/8" & 1"	1/16"	3/8"
THICKER WET 12" USA	1	32963	12"	1"	1/8"	3/8"
THICKER WET 14" USA	1	32964	14"	1"	1/8"	3/8"













##
























quality 4.0 speed 4.0 ref.31994 / 31998 quality 5.0 speed 3.0 ref.31999



quality 4.0

speed 4.0

- · Turbo blade. Turbo edge for faster cutting.
- · High Tech. High speed.
- · Use or wet or dry.

	REF			0	<u></u>	(
ARROWHEAD WET & DRY	31916	1	4 1/2"	5/8 &	1/16"	5/16"
TURBO 4 1/2"	31710		. 1, 2	7/8"	,10	
ARROWHEAD WET & DRY	30985	1	7"	% &	1/16"	1/16"
TURBO 7"	30703	1	/	7∕8"	716	716
ARROWHEAD WET 10"	30994	1	10"	% & 1"	1/16"	1/16"

ARROWHEAD

- · Recommended blade to cut fine porcelain tiles.
- · High Tech. High speed.

	REF		0	0	<u></u>	(6)
ARROWHEAD 7"	31901	1	7 "	5/8"	1/16"	5/16"
ARROWHEAD 10"	31900	1	10"	5/8"	1/16"	3/8"

- · Recommended blade to cut Glass mosaic, glass blocks and other glass materials.
- · High quality finish at low speed.

	REF		0	Ø		(
GLASS PREMIUM 7"	31994	1	7 "	5/8" & 7/8"	1/16"	1/4"
GLASS PREMIUM 8"	31998	1	8"	5/8" & 1"	1/16"	5/16"
GLASS PREMIUM 10"	31999	1	10"	5/8" & 1"	1/16"	5/16"



GLASS



PORCELAIN





· Recommended blade to cut glass.

	REF		0	0		
GLASS 7"	31920	1	7 "	5/8"	1/16"	5/16"
GLASS 10"	31919	1	10"	5/8"	1/16"	3/8"



- · Recommended blade to cut fine porcelain tiles.
- · High Tech. High speed on porcelain tiles.

0	U	1 -							
				REF		\bigcirc	0	@	(1)
PORCELAIN WET & DRY 4 1/2"				31914	1	4 1/2"	5/8 & 7/8"	1/16"	5/16"
WET & DRY 4 1/2" SUPER PRO			8	31913	1	4 1/2"	5/8 & 7/8"	1/16"	3/8"
PORCELAIN 7"				31912	1	7"	5/8"	1/16"	5/16"
PORCELAIN 10"				31907	1	10"	5/8"	1/16"	5/16"

GRINDING BLADES





NATURAL STONE





- · VACUUM BRAZED embossed plate.
- \cdot For edges and surfaces grinding of natural stone, all kind of ceramic tiles and paint or resin coatings.
- · For GRINDERS use.
- · Maximum recommended speed: 15,300 RPM.

	REF		0	Ø
VDF 100 FINE PRO	31974	1	4"	7/8"
VDG 100 COARSE PRO	31979	1	4"	7/8"



- · Recommended blade to cut fine natural stone.
- · High Tech. High speed on natural stone.

	REF		0	0		\bigcirc
NATURAL STONE 7"	31918	1	7"	5/8"	1/16"	5/16"
NATURAL STONE 10"	31917	1	10"	5/8"	1/16"	3/8"



























Stone cup wheel





RUBI

























- · For adjustment cuts and grinding on all types of porcelain and hard
- · For materials with <3/4" (20 mm) mm. thickness.
- · Electroplated continous rim blade.
- · Two-sided and reversible blade for a better performance.
- · For grinders use.: Connection: 5/8" thread.

	REF	0	
DIAMOND BLADE ECD 2IN1 4 1/2"	31976	5/8"	1
DIAMOND BLADE ECD 2IN1 5"	31977	5/8"	1



· Perfect for buffing work on any type of natural stone, especially granite and marble, and cured concrete surfaces.

	REF		0	Ø
STONE CUP WHEEL	31921	1	4"	5/s"

Cleaning Block



N-Cleaning Block





- · For cleaning of diamond blades.
- · Made of corindon with a #100 grit.

	REF	
CLEANING BLOCK	05973	5



- · Specifically designed to bring back the diamonds on the rim of diamond blades when cutting porcelain.
- · Made of silicon carbide with a #20 grit.

	REF	
N-CLEANING BLOCK	05974	5

Pad Support for polishing and buffing




- · Fixing brackets for flexible polishing and buffing blades 04" [100 mm].
- · Compatible with jobs dry and water-cooled.
- · VELCRO fastening.
- · Connection polisher / grinder with 5/8" thread.

	REF	Ø	0	
BACK-UP PAD 4	61934	4"	5/8"	1









- · Resin polishing pads.
- · 8 DRY polishing pads.
- · Maximum operating speed: 3,000 rpm.
- · Premium cooling technology on both versions [Dry & Wet].
- · Will remove scratches from all Natural Stones.

	REF	Ø	
RESIN DRY POLISHING PAD 50 GRIT 4"	61911	4"	1
RESIN DRY POLISHING PAD 100 GRIT 4"	61913	4"	1
RESIN DRY POLISHING PAD 200 GRIT 4"	61915	4"	1
RESIN DRY POLISHING PAD 400 GRIT 4"	61931	4"	1
RESIN DRY POLISHING PAD 800 GRIT 4"	61932	4"	1
RESIN DRY POLISHING PAD 1500 GRIT 4"	61933	4"	1
RESIN DRY POLISHING PAD 3000 GRIT 4"	61940	4"	1
RESIN DRY POLISHING PAD FINAL BUFF 4" [WHITE]	61973	4"	1

- · Resin polishing pads.
- · 8 WET polishing pads.
- · Maximum operating speed: 4,500 rpm.
- · Premium cooling technology on both versions (Dry & Wet).
- · Will remove scratches from all Natural Stones.

	DEE	\circ	Ø
	REF	\mathcal{Q}	
RESIN WET POLISHING PAD 50 GRIT 4"	61942	4"	1
RESIN WET POLISHING PAD 100 GRIT 4"	61945	4"	1
RESIN WET POLISHING PAD 200 GRIT 4"	61957	4"	1
RESIN WET POLISHING PAD 400 GRIT 4"	61958	4"	1
RESIN WET POLISHING PAD 800 GRIT 4"	61959	4"	1
RESIN WET POLISHING PAD 1500 GRIT 4"	61961	4"	1
RESIN WET POLISHING PAD 3000 GRIT 4"	61964	4"	1
RESIN WET POLISHING PAD FINAL BUFF 4" [WHITE]	61971	4"	1



- · Range of diamond rubber pads for roughing and edge polishing, cutting and surfaces of natural stone and ceramic tile.
- · Semi-flexible. Good adaptation to the user's hand.
- · Wet use is recommended.
- · Different grain sizes:
- \cdot # 60, # 120 and # 200 for roughing.
- · # 400 for polishing.
- · Dimensions of the diamond plate: 2 3/16 x 3 9/16 (55x90 mm).
- Rubber pad dimensions: $2^{5}/_{16} \times 3^{11}/_{16} \times 1^{3}/_{16}$ [58x94x30]

	REF	
DIAMOND POLISHING PAD GRAIN # 60	61974	10
DIAMOND POLISHING PAD GRAIN #120	61975	10
DIAMOND POLISHING PAD GRAIN #200	61976	10
DIAMOND POLISHING PAD GRAIN #400	61977	10







(o)



















TZ RUBI

 (\circ)

Powerful breaking system (up to 3307 lb), operable with just one hand.

2 Accurate with soft slider movements.

3 Large cutting capacity, up to 3/8" (21mm) thickness. Ideal for large format tiles*.

4 Robust with a foldable structure for high strength and easy transportation.

Excellent performance breaking system: Clean cuts with soft motion.

- · Robust chassis, guides and breaking system.
- · Swivel square with central pivot for fast and accurate measurements in angle cutting.
- · Adjustable lateral stop for repetitive cuts.
- · Support base for excellent tile placement.
- · Easy to transport: rubber wheels with bearings and handle.
- · Interchangeable sco ring wheels ranging from 0 1/4" 7/8"
- Includes Ø 1/4" (8 mm) SILVER and Ø 7/8" (22 mm) EXTREME scoring wheels. Reinforced textile bag for transport and protection.
- · On models 1300/1550:
- -The reinforced textile bag of these models includes 2 built-in wheels.

Accessories
Ref. 18980 Maintenance Kit



























	REF		69			~	Å		
TZ-850	17956	$\sqrt{}$	33 1/16"	24x24"	1/8-7/8"	3307 Lb	49,38 Lb	1	8
TZ-1020	17955	$\sqrt{}$	40 ¾16"	27 %16X27 %16"	1/8-7/8"	3307 Lb	54,23 Lb	1	8
TZ-1300	17957	$\sqrt{}$	51 3/16"	35 1/16x35 1/16"	1/8-7/8"	3307 Lb	66,14 Lb	1	8
TZ-1550	17958	√	61 1/16"	43 1/16×43 1/16"	1/8-7/8"	3307 Lb	72,75 Lb	1	8

^{*}Some materials with a thickness greater than 9/16" [15 mm] may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.



XX

TX-MAX



Professional manual cutter with high-performance multipoint breaker. For professional cutting of all types of ceramic and porcelain tile.



- Highly precise scoring.
- 2 Entire system highly efficient.
- Reinforced components. Heavy duty.
- 4 High breaking power (2646 lb) MASTER POWER. One-handed operation.
- Head with extra-long aluminium sliders with "self-lubricating" friction bearings.
- Portable breaker with aluminium pressure pad, equipped with plastic protector to avoid marking delicate surfaces. Better visibility of the scoring and cutting zone.
- The pressure pad is locked by a ratchet mechanism and is unlocked by the trigger, allowing one-handed scoring and breaking. Faster use. Increases performance with both thin and thick materials.
- Injected-aluminium base, reinforced with a central rib, for increased strength.
- Floating tables and supplementary arms for large-size ceramic tile, increases cutting stability.
- Rotating square, with central pivot point and lateral end stop. Greater precision in angle cuts.
- · Handle with soft grip for better ergonomics and comfort.
- Equipped with 05/16" (8 mm) SILVER and 0 7/8" (22 mm)
 EXTREME scoring wheels. Compatible with the entire plus line of scoring wheels.
- · Includes a carrying case (the 1250 model is equipped with wheels to transport the machine).

Accessories



Ref. 18980 Maintenance Kit



















	REF		<u> </u>			~			
TX-710 MAX	17910	$\sqrt{}$	28"	20x20"	1/8-13/16"	2646 Lb	29.3 Lb	1	10
TX-1020 MAX	17916	√	40 3/16"	27 %16"	1/8-13/16"	2646 Lb	42.8 Lb	1	10
TX-1250 MAX	17922	√	49 3/16"	33 1/16"	1/8-13/16"	2646 Lb	57 Lb	1	10

^{*}There are some materials over 9/16" (15 mm) thick which, due to their physical properties, possible inner or surface tensions, are difficult to cut manually. It is recommended to make some sample cuts to determine the compatibility of the product.





























 (\circ)

XX

TR-MAGNET



RUBI

Suitable for diagonal cuts with a revolving square for high accuracy. Ideal for professional cutting of porcelain tiles and intensive cutting of ceramic tiles.





- Fast operating system with magnet, for one handed use.
- 2 Reinforced operating material. Increased breaking power.
- Revolving square with central pivot for fast and accurate measurements for cutting angles.
- 4 Floating base with shock absorber for better tile breaking.
- Solid steel guides, Ø13/10" (20 mm), chrome-plated and rectified, with anti-corrosion treatment for increased torsional strength.
- · Multipoint breaker 1764 lb (800 kg) of power.
- · Heavy-duty metal arms.
- · Handle reinforced with SOFT-GRIP.
- · Lateral end stop for making repetitive cuts.
- · Base extension for large sizes.
- · Two-layer base with shock-absorbing effect.
- · High-strength aluminium base.
- · Interchangeable scoring wheels from 1/4" (6 mm) to 7/8" (22 mm).
- With Ø 3/8" (10mm) SILVER and Ø 7/8" (22mm) EXTREME scoring wheels and carrying case included.

Accessories:























	REF		<u> </u>		<i>_</i> ;	~			
TR-600 MAGNET	17907	$\sqrt{}$	24"	17x17"	1/8-9/16"	1764 Lb	31 Lb	2	18
TR-710 MAGNET	17908	√	28"	20x20"	1/8-9/16"	1764 Lb	34 Lb	1	15







Single-guide, with multipoint breaker and rotating square. Greater precision in angle cuts. Ideal for professional cutting of ceramic and porcelain tile.



- Single-guide head with 6 radial bearings for smoother, more precise sliding.
- 2 Self-adjusting bearing system (Patented).
 Does not require any adjustment by the user.
- Magnet System: The breaker can be locked and unlocked with one hand. Faster use.
- 4 Rotating square, with central pivot point. Greater precision in angle cuts.
- · High precision.
- · Chrome-plated trapezoidal guide.
- · Rotating square, with central pivot point. More precise angle
- · Injected-aluminium base for greater robustness.
- · With lateral end stop for repetitive cuts and thin Straps.
- Equipped with 2 additional aluminium arms for large-sized ceramic or porcelain tiles [Model 102].
- · Handle with soft grip for better ergonomics and comfort.
- Equipped with 022 mm EXTREME scoring wheel. For ceramic tiles with rough or structured surfaces. Compatible with 022 mm scoring wheel (ref. 18914) for tiles with smooth surfaces.

Accessories Ref. 18980 Maintenance Kit



























	REF	<u> </u>			~			
TQ-66	14997	26"	18 ½x18 ½"	3/16-9/16"	1764 Lb	26 Lb	1	24
TQ-75	14998	29 ½"	20 %x20 %"	3/16-9/16"	1764 Lb	28 Lb	1	24
TQ-102	14999	40 ¾₁₀"	27 %6x27 %6"	3/16-9/16"	1764 Lb	37 Lb	1	24



































RUBI

Single guide with multipoint separator and angular measurement. Ideal for high quality cutting of ceramic and porcelain tiles.



- Guide system highly resistant to impacts resulting in longer product life.
- 2 Ergonomic handle with incorporated separator for greater speed and ease of use.
- 3 Swivel bracket with central pivot for fast and accurate measurements.
- 4 Long-lasting laser engraved square.
- · Reinforced pressure pad.
- 12 mm reinforced guide. Greater bending resistance and increased precision.
- · Lateral end stop for making repetitive precision cuts.
- Two-layer base with shock-absorbing effect.Base extension for large sizes.Carrying handle. (TP-66-S and TP-75-S).
- · Assembly designed to be used by pushing the handle.
- · RUBIFLEX bi-material handle.
- · 0 22mm EXTREME scoring wheel included. (Ref. 01901)

	Accessories	
Û	Ref. 18980 Maintenance Kit	




















	REF	[~	\triangle		
TP-66 S	12914	26"	18 1/8"	³ / ₁₆ - ¹³ / ₁₆ "	2205 Lb	25.4 Lb	1	12
TP-75 S	12928	29 ½"	20 %"	3/16-13/16"	2205 Lb	26 Lb	1	12
TP-102 S	11902	40 3/16"	27 %16"	³ / ₁₆ - ¹³ / ₁₆ "	2205 Lb	39 Lb	1	12
TP-125 S	11975	49 3/16"	33 %6"	3/16-13/16"	2205 Lb	54 Lb	1	12







XX

TP-T



Single guide cutter with multipoint separator and angular measurement. Ideal for high quality cutting of ceramic and porcelain tiles.



- Single guide system highly resistant to impacts. Longer life.
- Separator set with height adjustment. Optimum separation for each thickness.
- 3 Swivel bracket with central pivot for fast and accurate measurement of angular cuts.
- 4 Long-lasting laser engraved square.
- Reinforced pressure pad.12 mm reinforced guide. Greater bending resistance and increased precision. Lateral end stop for making repetitive precision cuts. Two-layer base with shockabsorbing effect. Base extension for large sizes. Carrying handle. [TP-66-T and TP-75-T].
- · Assembly designed to be used by pulling the handle.
- RUBIFLEX bi-material handle. Ergonomic and heavy duty construction.
- Cut thickness adjustment system with 3 settings (6–9 mm/9–12 mm/12–20 mm)*, fast and precise.
- · 0 22mm EXTREME scoring wheel included. (Ref. 01901)

	Accessories
à.	Ref. 18980
	Maintenance Kit


















	REF	<u> </u>			~	Å		
TP-66 T	12917	26"	18 1/8"	3/16-13/16"	2.205 Lb	23.15 Lb	1	12
TP-75 T	12929	291/2"	20 %"	3/16-13/16"	2.205 Lb	24.25 Lb	1	12
TP-102 T	11903	40 3/16"	27 %16"	3/16-13/16"	2.205 Lb	36 Lb	1	-

































 \odot



TS-MAX



Authentic & Original: Lightweight and functional with high performance breaker. Ideal for professional cutting of porcelain tiles and intensive cutting of ceramic tiles.



- Progressive breaking system "SMART POWER" adapts to different material hardness.
- Wide base. Greater base surface for higher stability and cutting quality.
- Reinforced components for heavy duty work. High durability.
- 4 Ergonomic handles. Maximum comfort.
- Bigger reinforced base for a higher comfort and better stability when cutting.
- Powerful single point breaker. Up to (1764 lb) 800 kg breaking pressure.
- · Double guide for direct view of scoring/cutting line.
- · Chromed steel guides, rectified and calibrated, with anti-rust treatment.
- · Lateral stop for repetitive straight and 45° cuts.
- · Interchangeable scoring wheels ranging from 01/4" (6mm) to 7/8" (22 mm).
- · Includes 0 8mm ENDURE and 0 10 mm SILVER scoring wheels and a transport case with reinforced locks and hinges.

	Accessories:
Û	Ref. 18980 Maintenance Kit

















	REF		<u></u>			~			
TS-43 MAX (GREY)	18972	$\sqrt{}$	17"	12x12"	1/4-9/16"	1764 Lb	19.4 Lb	1	24
TS-66 MAX (GREY)	18974	√	26"	18 ½x18 ½"	1/4-9/16"	1764 Lb	29.5 Lb	1	20
TS-75 MAX (GREY)	18975	√	29 ½"	20 %x20 %"	1/4-9/16"	1764 Lb	33.3 Lb	1	20





××



SPEED-MAGNET



For the most demanding tiling projects.
For professional cutting all types of ceramic, porcelain and glass tile.



- Quick speed system with magnet, ideal for one-handed use. Easy and fast to use.
- 2 Great visibility during scoring.
- Reinforced structured elements. High breaking power.
- 4 Aluminum base for robustness. Light and easy to transport.
- · Solid 13/16" (20mm) steel guides. Chromed and rectified with anti-corrosion treatment for greater resistance to twisting.
- · Multipoint breaker 1764 lb (800kg) power.
- · Reinforced SOFT-GRIP handle.
- · Lateral stop for repetitive cuts and 45 degrees square.
- · Interchangeable scoring wheels ranging between 0 1/4" 7/8" [6mm-22mm].
- · Scoring wheel Ø 5/16" (8mm) ENDURE. included.
- · Direct view of scoring and cutting line.
- · 72/92 models:
- -Aluminum lateral support and bigger breaker system.

	Accessories .	
Û	Ref. 18980 Maintenance Kit	





















	REF		<u> </u>			~	Å		\bigoplus
SPEED-62 MAGNET WITH CASE	14988	$\sqrt{}$	24"	18"	1/8-9/16"	1764 Lb	25.4 Lb	2	24
SPEED-72 MAGNET WITH CASE	14989	√	28"	20"	1/8-9/16"	1764 Lb	30 Lb	2	18
SPEED-92 MAGNET WITH CASE	14990	√	36"	25"	1/8-9/16"	1764 Lb	37 Lb	2	18































 \odot

i

XX



SPEED-N



The most versatile tile cutter in it's range.

For professional cutting of ceramic tiles and glass and occasionally for porcelain tiles.







- Reinforced structured elements. High breaking power.
- 2 Chromed and rectified steel guides, with anticorrosion treatment. Higher durability.
- 3 Aluminum base for higher robustness.
- 4 Light and easy to transport.
- · With lateral stop for repetitive cuts and 45 degree squares.
- · Interchangeable scoring wheels ranging between 0 1/4" (6mm) to 0 3/8" (10mm).
- · Scoring wheel 0 5/16 (8 mm) SILVER included.
- · Direct vision of scoring and cutting line.
- · 72/92 models;
- -Aluminum lateral support.

	Accessories
Û	Ref. 18980 Maintenance Kit











	REF					Å		
SPEED 42-N WITHOUT CASE	14949	-	17"	12x12"	3/16-9/16"	12 Lb	2	64
SPEED-62 N WITH CASE	14985	√	24"	18x18"	3/16-9/16"	23 Lb	2	24
SPEED-72 N WITH CASE	14986	V	28"	20x20"	3/16-9/16"	28 Lb	2	18
SPEED-92 N WITH CASE	14987	V	36"	25x25"	3/16-9/16"	35 Lb	2	18





FAST

Light and versatile cutter.

For professional cutting of ceramic tiles and glass.



- Extruded aluminum base.
- New rigid and stable separator.
- 3 Reinforced 3/4" (18mm) guides for greater resilience.
- 4 Four side brackets for a great additional support.
- · Wider foam base.
- · Chromed steel guides with anti-rust treatment.
- · Lateral stop with 45° square.
- · Base for greater support of the tile.
- · Interchangeable scoring wheels from 01/4"(6mm) to 13/32" [10mm].
- \cdot 01/4" (6mm) SILVER scoring wheel included.
- · Two-layer base with shock absorption.
- · Direct view of the scoring and cutting line.

Ref. 18980		Accessories:	
Maintenance Nit	Î	Ref. 18980 Maintenance Kit	

















	REF		69			$ rac{\circ}{}$			
FAST-65	13940	-	25 %6"	17 ¹¹ / ₁₆ ×17 ¹¹ / ₁₆ "	1/2"	13.9 Lb	15.4 Lb	4	48
FAST-85	13941	-	33 7/16"	24x24"	1/2"	16.5 Lb	18.7 Lb	2	32

































STAR PLATINUM



Light and versatile manual cutter. For cutting ceramic tiles and glass.







Multipoint breaker with aluminium pressure pad and steel breaker bar for greater

ROBUSTNESS and breaking POWER. 2 CLOSED Sliders manufactured in POM and

STABLE for EASIER tile scoring.

side extensions for large pieces.

aluminium tool holder, more RIGID and

3 Cast aluminium base, LIGHT and STRONG with

- · Solid, chromed, ground and calibrated steel guides with anticorrosion treatment.
- · Side stop with millimetre scale and 45° square.
- · Scoring wheels adaptable to each material to obtain the maximum cutting performance and quality in each case.
- · 0 1/4" (6 mm) SILVER scoring wheel included.



















	REF						
STAR-51 PLATINUM	15901	-	20 1/16"	1/2"	8.29 Lb	6	1
STAR-63 PLATINUM	15902	-	24 13/16"	1/2"	9.68 Lb	6	1






XX

SCORING WHEELS FOR MANUAL CUTTERS

		Ø 6 mm Ø 1/4 inch	Ø 8 mm Ø 5/16 inch	Ø 10 mm Ø 3/8 inch	Ø 18 mm Ø 3/4 inch	Ø 22 mm Ø 7/8 inch
	SILVER	01945	01902	01946	01950	
TS-MAX	GOLD			01949		
TR-MAGNET SPEED-MAGNET			01906			
	EXTREME					01907
SPEED-N	SINER	01945	01902	01946		
FAST POCKET STAR PLATINUM PRACTIC	GOLD			01949		
STAR			01906			
	SILVER		01959	01904	01905	
TZ	GOLD			01993		
TX-MAX			01903			
	EXTREME					01900
ΤQ	SILVER					18914
TP	EXTREME					01901
	SILVER					18914
SLIM CUTTER	EXTREME					01901
BASIC	SIVER			01960 0.14 mr 0.9/16 i		



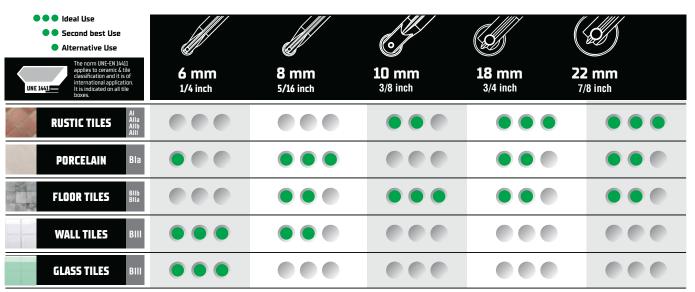

The RUBI® scoring wheels are manufactured using highly resistant, durable Tungsten Carbide. GOLD & EXTREME: Scoring wheel made from Tungsten Carbide with Titanium surface treatment, long-lasting.



(o)

##

Ċ

XX

6mm SILVER Scoring wheel [01/4"] RUBI





- · For Wall tiles.
- · Tungsten Carbide scoring wheel of high resistance and
- · Patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF		
SCORING WHEEL 01/4" (6MM) SILVER	01945	10	4600

8mm SILVER Scoring wheel [05/16"]





- · For Wall tiles, Floor tiles and Porcelain tiles.
- · Tungsten Carbide scoring wheel of high resistance and durability.
- · Patented model with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF		
SCORING WHEEL 05/16" (8MM) SILVER	01902	10	4600

8mm ENDURE Scoring wheel [05/16"]



- · For sharp cutting in hard tiles
- · Ideal for rough or structured surfaces.
- · Wheel made of Tungsten Carbide.
- · Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.

	REF	
SCORING WHEEL 05/16" (8MM) ENDURE	01906	5

10mm SILVER Scoring wheel [03/8"]





- · For Floor tiles.
- · Tungsten Carbide scoring wheel of high resistance and
- · Handle made with new high technology RUBI® alloy; maximum precision and resistant to wear.

	REF		
SCORING WHEEL 03/8" (10MM) SILVER	01946	10	4600

18mm SILVER Scoring wheel [03/4"]





- · For rough and difficult to cut ceramic tiles.
- · Tungsten Carbide scoring wheel of high resistance and durability.
- · Patented shaft geometry; maximum precision and minimum vibration.

	REF		
SCORING WHEEL 03/4" (18MM) SILVER	01950	10	3600

22mm Scoring wheel (07/8") EXTREME





- · For sharp cutting in hard tiles with rough or structured
- · Tungsten Carbide scoring wheel with a superficial Titanium treatment.
- · Patented geometry shaft, for maximum precision and minimum vibration.
- · Patented model for maximum precision and minimum vibration.
- · Extra-long life.

	REF	
SCORING WHEEL 07/8"(22MM) EXTREME	01907	5



1

××

8mm PLUS Scoring wheel (05/16") ENDURE



PATENTED





- · For sharp cutting in hard tiles
- · Ideal for rough or structured surfaces.
- · Wheel made of Tungsten Carbide.
- · Patented geometry shaft, for maximum precision and minimum vibration.
- · Extra-long life.

	REF	
8MM PLUS SCORING WHEEL (05/16") ENDURE	01903	5

10mm PLUS SILVER Scoring OFFICE wheel [03/8"]



PATENTED



- · For Floor tiles.
- · Tungsten Carbide scoring wheel of high resistance and
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF		
10MM PLUS SILVER SCORING WHEEL (03/8")	01904	10	3600

18mm PLUS SILVER Scoring OFFICE wheel (03/4")







- · For rough and difficult to cut tiles.
- · Tungsten Carbide scoring wheel of high resistance and
- · Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF		
18MM PLUS SILVER SCORING WHEEL (03/4")	01905	10	3600

22mm Scoring Wheel Plus Extreme(0 7/8")








- · For sharp cuttings in hard ceramic and porcelain tiles.
- · Tungsten Carbide scoring wheel with a superficial Titanium treatment.
- · Mounted on bearing. Enhanced smooth user perception.
- · Extra-long life.

	REF		
22MM SCORING WHEEL PLUS EXTREME (Ø 7/8")	01900	5	

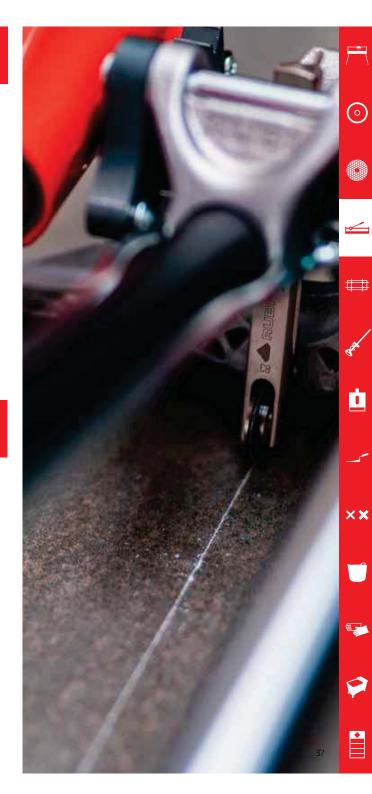

22mm SILVER Scoring Characteristics wheel [07/8"] TP/TQ



22mm Scoring Wheel Plus Extreme (0 7/8") TP/TQ



Scoring wheel set 1





##

Ŀ

XX



• Exclusive for TP/TQ cutters. Suitable for smooth and even






- · For sharp cuttings in hard ceramic and porcelain tiles.
- Tungsten Carbide scoring wheel with a superficial Titanium treatment.
- · Mounted on bearing. Enhanced smooth user preception.
- · Extra-long life.

	REF	
22MM SCORING WHEEL PLUS EXTREME (Ø 7/8") TP/TQ	01901	5



- For TS-MAX, TR-MAGNET, TF-MAX, SPEED-MAGNET, SPEED-N, FAST, STAR-MAX, STAR, POCKET & PRACTIC ranges, includes 1 01/4" (6mm) SILVER scoring wheels and 1 03/8" (10mm) SILVER scoring wheel.
- · In plastic box with transparent cover.
- · Supplied in blister

	REF		
SCORING WHEEL SET 1	01995	5	450



· Scoring wheel guide made for Tungsten Carbide.

surfaces and slightly rough surfaces.

18914 10

REF

Scoring wheel set 2





- For TS-MAX, TR-MAGNET, TF-MAX & SPEED-MAGNET models, includes 1 scoring wheel of 01/4" (6mm), 05/16" (8mm), 03/8" (10mm), 07/8" (22mm) (2 units) SILVER.
- · In plastic box with transparent cover.
- · Supplied in blister.

	REF		
SCORING WHEEL SET 2	01969	5	450



TC-125 CIRCULAR CUTTER KIT



Circular cutter, smooth and precise, ideal for ceramic sheets.
For cutting all types of ceramic and porcelain sheets. Suitable for use with natural and sintered stone. Especially suitable for large tiles.



DESIGN



NECESSARY the use of SLIM SYSTEM guides.

- Equipped with a carbon steel slide on adjustable stainless steel radial bearings.
- 2 Double dust reduction/control system. Dry and wet cutting.
- 3 Height-adjustable cutting head (plunge effect), hinged from 0° to 45°. (miter). FAST adjustment system.
- 4 More ergonomic. Additional BI-MATERIAL handle, mainly for miter cuts.
- · Compatible with discs of 4-1/2" & 5" [125 or 115 mm] diameter. [Suitable for discs with reinforcement plate, TVA type].
- Switch with safety lock. Prevents unintentional start-up. Electrical cable with PRCD.
- Direct connection (32 mm diameter) vacuum cleaner. Includes adapter for other models (37, 42 and 50 mm diameter).
- Quick connection and regulating valve for hose** (16 mm diameter). Rubber stopper for suction outlet. Improves ergonomics during wet cutting.
- Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. Facilitates disc change and minimises the projection of particles and water.
- · Tilting side guard for miter cuts. reduces water splashing and improves dust suction.
- · Includes TCR-125 SUPERPRO disc (dry cutting), transport case and accessories. Facilitates transport and handling.

	Accessories
18911	Slim System cutter
18913	Slim System Cutter Guide
18834	Suction cup
52220	Fixing C-Clamp
31949	VIP Blade 5"
31977	2in1 5" Blade

















XX









































- · Switch with safety lock. Prevents unintentional start-up. Electrical cable with RCD.
- · Bi-material additional grip. Principally for miter cuts.
- · Compatible with diamond discs of 5" [125 mm]or 4–1/2" [115 mm] diameter. (Suitable for discs with reinforcement
- · Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. Facilitates disc change and minimises the projection of particles and water.
- · Includes TCR-125 SUPERPRO 5" disc (dry cutting), transport case and accessories. facilitates transport and handling.

	REF		RPM	5	<i>_</i> Z		\otimes	0	1		
TC-125 USA	51957	$\sqrt{}$	13800	110-130V 50-60Hz.	13/16-1"	%16 ⁻¹¹ /16"	4 ½-5"	7/s"	129 ¹⁵ / ₁₆ x94 ½x81 ½"	31 Lb	1

- · Includes:
- Suction Cups x2 (Ref.18834)
- Fixing C-Clamp x2 (Ref.52220)
- Cutter Guides x3 (Ref.18913)
- Carrying Bag. [Ref.18230]

	REF		
GUIDES TC-125 USA PACK 2	51969	√	1

SLIM CUTTER PLUS



Manual cutting system with connectable guides. For manual cutting of large porcelain tiles with thicknesses between 1/8" and 3/8".



















The Slab Breaker Plus (ref. 18917) must be used for thicknesses from 3/8" (10 mm) to 9/16" (15 mm).

- 43 5/16" (110 cm) long extruded aluminium guides which can be connected together.
- 2 126" (320 cm) cutting capacity (extendable according to need by adding extra guides, Ref.18913).
- 3 natural rubber suction cups suitable for smooth and rough surfaces for better fixing of the guides to the tile.
- Breaking system by adjustable nippers with soft-grip handle, which facilitates and ensures progressive breaking of the tile, thus reducing the risk of cracking. 2-in-1 nippers and breaker.
- · Recommended thicknesses between 1/8" and 3/8" (3 10 mm).
- · More ergonomic scoring carriage with a score increase of 30 %.
- 0.7/8" (22 mm) RUBI EXTREME scoring wheel made of Tungsten Carbide with Titanium Carbide treatment and bearings, to offer better scoring performance and quality.
- Includes practical transport bag manufactured in reinforced nylon with handles and shoulder strap. Includes 4 interior compartments for accessories.
- Each set contains: Three 43 5/16" (110 cm) guides. 1 scoring carriage with 7/8" (22 mm). Extreme scoring wheel, 1 set of nippers, 3 suction cups and 1 Allen key.

	Accessories:
18917	Slim Separator
18912	Slim cutter pliers
18913	Slim System Cutter Guide 43 5/16" (110 cm).
18713	Head Set Slim Cutter
18834	Suction pad slim cutter
-	





























Slim System **Cutter Guide** RUBI



Slim System Cutter Guide SUPERPR



Slim System Cutter Guide



























· Aluminium guide- 43 5/16" (110 cm).

	REF	Å	
SLIM SYSTEM CUTTER GUIDE 110CM.	18913	3.7 Lb	1

· Separation system that ensures gradual separation of the

18812

tile by reducing risk of breakage

PLIERS SLIM CUTTER



- · Auxiliary breaker for the cut of slim porcelain slabs or large tiles.
- · To separate thicknesses of 6 mm or more.
- \cdot Soft-grip handle for a better comfort and ergonomic.
- · With width adjustment system, to achieve an equal, uniform and symmetric distribution of breaking forces when cutting narrow Straps.
- · Rubber pressure pad for greater control and more precise separation.

	REF	
SLAB BREAKER PLUS	18917	1



· Replacement of the slim cutter.

	REF	
HEAD SET SLIM CUTTER	18713	1

Slim System Cutter Guide SUPERPRO





Suction cup for Slim Cutter





· Replacement suction cup for Slim Cutter and TC125 guides.

	REF	
SUCTION CUP FOR SLUM CUTTER.	18834	1

Vacuum suction pad SLAB TRANS HEAVY DUTY





- · This is a replacement suction cup for the Slab Trans Heavy Duty transport system.
- · It can also be used as an additional cup for extra security. Ideal for heavy loads.
- · NOTE: Adding more suction cups does not increase the original maximum load of 309 lb (140kg). It provides extra security in case of cup failure.

	REF	
VACUUM SUCTION PAD SLAB TRANS HEAVY DUTY	18827	1



Slim EASY TRANS





- · This system can be used as a complement to the Slim cutter (Ref. 18911).
- · Includes two retracting guides adjustable from 63" to 126" (160 to 320 cm) and 10 suction cups for securing rough and smooth surfaces [Ref.66929].
- · Maximum load of the unit: 132lb (60 kg).
- · For pieces up to 3 m.
- · Accessory: Ref. 18819.

	REF	Å		
SLIM EASY TRANS	18910	36.6 Lb	1	12


Slim Easy Trans supplementary guide set











- · Increases the rigidity of the unit.
- · Facilitates handling of the pieces.
- · Fast and easy to assemble and disassemble.
- · Black anodized finish.


	REF	
SLIM EASY TRANS SUPPLEMENTARY GUIDE SET	18819	1



RUBI

- Equipped with wheels and side pocket. Double zip and safety locks inside.
- · Dimensions: 79"x10 3/7"x 10 5/8" (201x26.5x27 cm).
- · Capacity: 124 liters.
- · Weight: 15 lb (6.75 kg).

	REF	
CARRYING BAG FOR SLAB TRANS HEAVY DUTY	18841	1

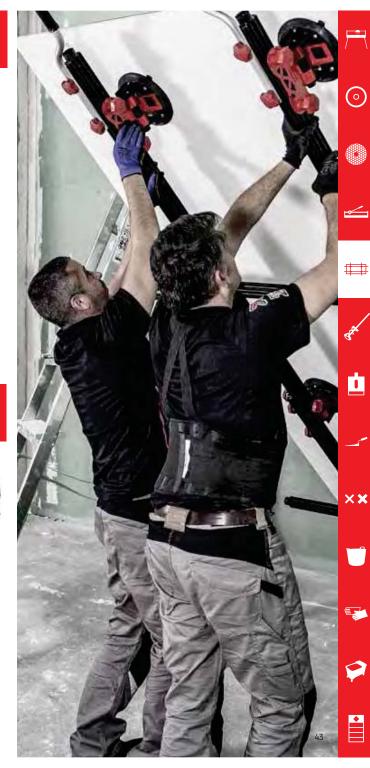

 (\circ)


RUBI

SLAB TRANS HEAVY DUTY

Especially suited for handling thicker pieces.



Reinforced aluminium profile. Greater structural strength.



3 Equipped with six vacuum suction cups. Increased load capacity.

Fast and Easy to assemble and disassemble. Easy fix system.

- · Black anodized finish.
- · Fully adjustable from 65" to 126" (165 to 320 cm).
- · Maximum load capacity: 309 lb (140 kg).
- Dimensions: 150"x67"x9"(380x170x23,7 cm). (fully extended).
- Maximum handling size: 142"x63" [360 x 160 cm].
- · Includes carrying bag for slab trans heavy duty (Ref.18841).



Fully adjustable framework for handling large ceramic/porcelain/natural stone slabs.

Accessories



Ref. 18827

Vacuum suction pad SLAB TRANS HEAVY DUTY









Additional vacuum suction cups available can be attached to the system but it does not increase the maximum load capacity of 309 lb [140 kg].





××

Slab Trolley



Slab Table









- · Transport system and manoeuvre for large format tiles.
- · Especially suitable for thicker/heavier slabs.
- Exclusive to the Slab trans HD (Ref.18936) and Slim easy trans systems (Ref.18910+18819).
- · Easy and quick to assemble and disassemble. Easy fix connection system.
- · Ultra light and compact.
- · Extendable support arm for greater ergonomics when loading and unloading pieces on the
- · Maximum load capacity: 309 lb (140 kg) (including material and trans system).

	REF	<u>*</u>		
SLAB TROLLEY	18934	33 Lb	1	5





- · Workbench to support the cutting and preparation of large format materials using the tools of the Slab system range.
- Extra-reinforced bars thus increasing the rigidity of the workbench.
- The structure of the table together with the levelling feet achieves a greater stability of the set.
- · Assembly and disassembly fast and easy. Easy fix connection system (hammerhead screws).
- · Folding legs. Equipped with security system against involuntary closing.
- · Dimensions in working position: 71"x41"x28" (180x104x70 mm).
- Dimensions in transport position: 71"x41"x8" (180x104x20mm).
- · Working height: 27 4/7" (70 cm).
- · Maximum load capacity: 551 lb (250 kg).

Recommended using two Slab Table for porcelain panels.

	REF	Å	٨		
SLAB TABLE	18935	76.1 Lb	79 Lb	1	9



























i

XX





RUBI





	REF	
SINGLE SUCTION CUP	66955	1



- Body made of highly resistant aluminium. With ergonomic handle for greater comfort.
- Maximum load capacity: 176,4LB (80 kgs).

	REF	
DOUBLE SUCTION CUP	66956	1



- · Body made of highly resistant aluminium. With ergonomic handle for greater comfort.
- · Maximum load of capacity: 220lbs (100 kg).

	REF		
TRIPLE SUCTION CUP	66904	1	80

RM Rough Surface Suction Superpro



- · Suction cups for handling tiles with rough and/or slightly
- · Injected polycarbonate body. Very light.
- Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.

structured surfaces.

- · Maximum load capacity: 55 lb(25 kg).
- · Suction cup diameter: 4 3/4"(120 mm).

Saction cap diameter. 13/1 (120 mm).		
	REF	
RM ROUGH SURFACE SUCTION CUPS	66929	1

RM Rough Surface Double Superpro



- Double suction cup for handling tiles with rough and/or slightly structured surfaces.
- · Injected polycarbonate body. Very light.
- Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle for faster, safer handling.
- · Natural rubber.
- · Maximum load capacity: 121lb (55 kg).
- · Suction cup diameter: 4 3/4".

	REF	
RM ROUGH SURFACE DOUBLE SUCTION CUP	66952	1

Suction cup with Vacuum Pump 08"







- · Suction cup for handling large and heavy tiles.
- · Adapts to any surface finish.
- · Suction applied by manual vacuum pump.
- · Load loss indicator (red mark).
- · Pressure-release mechanism.
- · Maximum load capacity: 243 lb (110kg).

		-		٠,		
					REF	
SUCTION CUP WITH VAC	UUM	PUMP	08"		18919	1

RUBIMIX-9 N



Versatility by changing the mixing paddle. For cementitious adhesives, resins, paints and other materials.



- Higher mixing performance, thanks to a more efficient torque.
- 2 Speed gearbox and progressive switch (R.P.M. regulation) to optimize the mixing of each material.
- Quick and easy to change the brushes. High comfort.
- 4 Safety lock to prevent unexpected start.
- · Power: 1200 W.
- · Double insulation.
- · Direct connection M14 thread.
- Electronic regulator (1st 0-650 r.p.m. / 2nd 0-850 r.p.m.). Ø maximum paddle: 140 mm.
- \cdot 0 4 3/4" (120 mm.) mixing paddle included.









	REF	W	5	RPM	\triangle		\square
RUBIMIX-9 N USA + CHUCK	24949	1200	110-130V 50-60 Hz. 1ª I	0-650 / 2ª 0-850	12.3 Lb	2	24































RUBIMIX-9 N PLUS





More power and performance For cementitious adhesives, resins, paints and other materials




- Powerful 1800W motor for greater mixing capacity and high reliability.
- 2 New and improved handle. High comfort and stability.
- 2 speed gearbox and electronic regulator (r.p.m.) to optimize the mixing of each material.
- 4 Quick and easy to change the brushes. High comfort.
- Electric mixer for mortar of great power: 1800W. Double insulation.
- · Safety lock to prevent unexpected start.
- · Direct connection M14 thread.
- Electronic regulator (1st 0-450 r.p.m. / 2nd 0-780 r.p.m.).0 maximum paddle: 6" 5/16 (160 mm).
- · 0 5 1/2" (140 mm.) mixing paddle included.
- · Includes Fast-in Adapter.
- · Chuck included. With M14 male adapter allows hex shaft paddles to be used.













XX

RUBIMIX E-10 ENERGY



Cordless Battery Mixer.

For cementitious adhesives, resins, paints and other materials.



- Brushless motor. Maintenance-free and increases the product's lifespan. Maximum efficiency.
- 2 Powered by 18V 5Ah Li-lon battery.
- 3 Light and strong. Maximum reliability.
- 4 Dual bi-material grip handle. Better ergonomics, comfort and stability
- · Equipped with a 2 speed gearbox.
- · Progressive switch (RPM control) to optimise the mixing of each
- · Switch safety lock. Prevents unintentional start-up.
- · LED battery-charge indicator.
- · Connection to mixing paddles with M14 thread and FAST-IN adapter (included).
- · Double-insulated motor.
- · Ref. 26965 Includes: Mixer, Battery Charger, 1 battery and M-120-FI mixing paddle.















	REF		5	RPM			
RUBIMIX E-10 ENERGY 18V CORDLESS MIXER	26965	$\sqrt{}$	100-240V 5A 50-60Hz 1ª	0-420/ 2ª 0-700	19 Lb	1	20
BATTERY ENERGY 18V 5AH	26966					1	































Mixer Paddles FAST-**IN 3HELIX**







- · To mix cement mortars.
- · Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- · Fast connection without tools FAST-IN
- · Compatible with RUBIMIX-9 N PLUS, RUBIMIX E-10 ENERGY, RUBIMIX-16 ERGOMAX or FAST-IN (Ref. 76907) Adaptable to any mixer with M14x2 connection.

	REF	*****	Į[Ī		
MIXER PADDLE M-100-FI 3H	76941	33-44 Lb	21 5/8"	4"	6	
MIXER PADDLE M-120-FI 3H	76942	33-55 Lb	24"	4 3/4"	2	
MIXER PADDLE M-140-FI 3H	76943	55-88 Lb	24"	5 1/2"	2	84
MIXER PADDLE M-140-FI 3H	76944	66-132 Lb	24"	6"	2	84

Adapter FAST-IN thread







- · Adapter for use of the FAST-IN mixer paddles.
- · Transforms threaded connection M14x2 to quick connection system FAST-IN.
- · Adaptable to any mixer with M14x2 thread.

	REF	
FAST-IN ADAPTER	76907	1

Mortar mixer paddle Thread M14 3HELIX



- · To mix cement mortars
- · Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- · Less effort in mixing.
- · Less vibrations. Greater comfort.
- · M14 x 2 thread connection.
- · Adaptable directly to RUBIMIX-9/9 PLUS and other brands.

	REF	*****	E	ŧ		
MORTAR MIXER PADDLE	25978	33-44	21 ⁵ / ₈ "	4"	7	
M-100-R 3H	23970	Lb	21 7 8	4	2	
MORTAR MIXER PADDLE	25979	33-55	24"		6	
M-120-R 3H	23717	5979 Lb		4 3/4"	U	
MORTAR MIXER PADDLE	26953	33-55	24"	4 3/4"	6	
M-120-R 3H LONG	20733	Lb	24	4 3/ 4	U	
MORTAR MIXER PADDLE	76919	55-88	24"	5 1/2"	2	84
M-140-R 3H	70717	Lb	24	J 1/2	2	
MORTAR MIXER PADDLE	76940	66-132	24"	6"	7	84
M-160-R 3H	/0740	Lb	24	U	2	04

Standard mixer hexagonal paddle



- · To mix all materials.
- · 10 mm. hexagonal finish.
- · Adaptable to RUBIMIX-9/9 PLUS by chuck (Ref. 71967).

	REF	******	1	Ī	
STANDARD MIXER	65931	22-33 Lb	20.1/2"	/ F /O"	
PADDLE ML-120	05951		20 1/2"	4 5/8"	

Eggbeater











- · To mix thinset, mortar, grout and other setting materials.
- · Reduces the creation of bubbles.
- · White zinc coating for rust protection.
- · 27" hexagonal shaft...

	REF	E	8	
EGGBEATER	76908	5"	27"	6

- · To mix mortar and other cement based adhesives.
- · Made of steel with epoxy coating.
- · Hexagonal shaft.

	REF	I	Į.	******	
MORTAR MIXER PADDLE	24957	/ /"	30"	33-44 l h	٦
M-100-L	24737	4	20	33=44 LU	2



XX

EASY GRES drill bits 07/32" to 1/2" [6-12 mm.]





- · Diamond drill bits to be used with electric drill without hammer.
- · The quality of the diamond allows the drilling of ceramics, porcelain, granite, marble and glass.
- · Ideal to install bathroom accessories and any type of decorative accessories over ceramic surfaces.
- · They must always be used with the EASY GRES guide which allows their adequate refrigeration ensuring a high accuracy and good results.
- · Average life between 5 and 10 holes depending on the material.
- · Body made of steel and bit made of electrodeposited diamond.
- · Lateral opening to improve cooling of the drill bit and to allow the elimination of solid waste produced after the drilling of the hole.
- · Recommended speed of use between 400 and 1000 r.p.m. depending of the material to be drilled.
- · To achieve a better finish and a longer life of the drill bit, it's important to observe the adequate speed of use and to apply a moderate pressure during the drilling. Supplied in blister.

	REF	RPM		
EASY GRES DRILL BIT 7/32" [6 MM.]	04922	1000 max.	1"	10
EASY GRES DRILL BIT 1/4" (6.5 MM.)	05913	1000 max.	1"	10
EASY GRES DRILL BIT 5/16" [8 MM.]	04923	1000 max.	1"	10
EASY GRES DRILL BIT 3/8" (10 MM.)	05914	1000 max.	1"	10
EASY GRES DRILL BIT 1/2" (12 MM.)	04921	1000 max.	1"	10
EASY GRES DRILL BIT 7/32" SET	04927	1000 max.	1"	10
EASY GRES DRILL BIT 5/16" SET	04928	1000 max.	1"	10
EASY GRES DRILL BIT 3/8" SET	04929	1000 max.	1"	10
EASY GRES DRILL BIT 1/4" AND 3/8" SET	04909	1000 max.	1"	10

EASY GRES drill bits 0 3/4" - 4 3/4"

































- · Electroplated diamond drills for use with electric drill without hammer.
- The quality of the diamond permits drilling ceramic, porcelain, granite, marble and glass.
- · Always use water-cooled.
- · The use of the MULTIDRILL guide (Ref. 50944) and the water tank (Ref. 50947) to cool and prevent movement of the drill bit during drilling getting good finishes.
- The working speed varies between 400 and 1000 r.p.m., depending on the material to be drilled.
- · Average life of 10 holes, depending on the material.
- · Body in steel and electroplated diamond tips.
- · Lateral opening for improved cooling and allow the removal of solid waste after each hole.
- · For a better finishing and longer bit life, it is important to respect the right speed and moderate pressure during drilling.
- · Supplied in blister.

	REF	RPM	+	
EASY GRES DRILL BIT 3/4" (20 MM.)	05941	500 max.	1 1/16"	1
EASY GRES DRILL BIT 11/8" [28 MM.]	05942	500 max.	1 1/16"	1
EASY GRES DRILL BIT 1 3/8" [35 MM.]	05943	500 max.	1 1/16"	1
EASY GRES DRILL BIT 1 5/8" [40 MM.]	05944	500 max.	1 1/16"	1
EASY GRES DRILL BIT 1 3/4" [43 MM.]	05965	500 max.	1 1/16"	1
EASY GRES DRILL BIT 2" (50 MM.)	05966	500 max.	1 1/16"	1
EASY GRES DRILL BIT 2 1/4" (55 MM.)	05967	500 max.	1 1/16"	1
EASY GRES DRILL BIT 2 1/2" [65 MM.]	05969	500 max.	1 1/16"	1
EASY GRES DRILL BIT 2 11/16" [68 MM.]	05978	500 max.	1 1/16"	1
EASY GRES DRILL BIT 3" (75 MM.)	05979	500 max.	1 1/16"	1
EASY GRES DRILL BIT 4" (100 MM.)	05981	500 max.	1 1/16"	1
EASY GRES DRILL BIT 4 3/4" (120 MM.)	05982	500 max.	1 1/16"	1



Kit DRYGRES





RUBI









##







XX

















• Maximum operating speed 14,000 r.p.m. 5/8" connection. Usable with grinder. Supplied in blister.

	REF RPM	
DRYGRES DRILL BIT 0 1/4" (6 MM.)	05993 14000 max. 17/16"	1
DRYGRES DRILL BIT Ø 5/16" [8 MM.]	05932 14000 max. 17/16"	1
DRYGRES DRILL BIT 0 3/8" (10 MM.)	05901 14000 max. 17/16"	1
DRYGRES DRILL BIT Ø 1/2" [12 MM.]	05933 14000 max. 17/16"	1
DRYGRES DRILL BIT 0 3/4" (20 MM.)	05934 14000 max. 17/16"	1
DRYGRES DRILL BIT Ø 1 1/8" [28 MM.]	05902 14000 max. 17/16"	1
DRYGRES DRILL BIT Ø 1 3/8" [35 MM.]	05987 14000 max. 17/16"	1
DRYGRES DRILL BIT 0 1 3/4" [43 MM.]	05936 14000 max. 17/16"	1
DRYGRES DRILL BIT @ 2" (50 MM.)	05903 14000 max. 17/16"	1
DRYGRES DRILL BIT Ø 2 1/2" (65 MM.)	05937 14000 max. 17/16"	1
DRYGRES DRILL BIT 0 3" (75 MM.)	05938 14000 max. 17/16"	1





- · MULTIDRILL guide with suitcase.
- · Dry cutting diamond drill bits:
- · 01 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm),2"(50mm)&2 11/16"[68mm]..

	REF	RPM		
KIT 5 BITS DRYGRES	05996	14000 max.	1 7/16"	1

KIT EASY GRES PLUS







- · The kit includes:
- · MULTIDRILL guide.
- · Water tank and hose.
- · EASY GRES drills 0 3/4", 1 1/8", 1 3/8", 1 3/4", 2", 2 1/2" and 3" [20, 28, 35, 43, 50, 65 and 75 mm.] and case.

	REF	RPM			
KIT EASY GRES PLUS	51919	500 max.	1 1/16"	1	48

















- · MULTIDRILL Guide.
- · Tank and hose.
- · Diamond drill bits 0 3/4", 1 1/8", 1 3/8", 1 3/4", 2" and 2 11/16" (0 20, 28, 35, 43, 50, 68 mm.).
- Case.

	REF	RPM		
KIT FORAGRES	50903	900 max.	1 3/16"	1

- · To drill Floor tiles, Porcelain tiles, Granite and Marble.
- · Always use cooled with water and non-hammer electric
- \cdot 0 1 5/8" (40 mm.) drill bit, designed for housing of toilet flushing mechanisms. Supplied in blister.

	REF	RPM		
FORAGRES DRILL BIT 3/4" (20 MM.)	04970	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 1/8" (28 MM.)	04971	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 3/8" (35 MM.)	04972	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 5/8" (40 MM.)	04963	900 max.	1 3/16"	1
FORAGRES DRILL BIT 1 3/4" (43 MM.)	04981	900 max.	1 3/16"	1
FORAGRES DRILL BIT 2" (50 MM.)	04973	900 max.	1 3/16"	1
FORAGRES DRILL BIT 2 1/2" (65 MM.)	04974	900 max.	1 3/16"	1
FORAGRES DRILL BIT 3" (75 MM.)	04975	900 max.	1 5/16"	1
FORAGRES DRILL BIT 4" (100 MM.)	04976	450 max.	1 3/16"	1
FORAGRES DRILL BIT 4 3/4" (120 MM.)	04977	450 max.	1 3/16"	1

- · Specially designed for dry drilling in porcelain tile. Suitable for other ceramic materials, natural stone and artificial stone.
- · With high resistant welding of the diamond grains for a longer duration.
- · "Easy-Start" Without slipping. Suitable for work without a centering guide.
- · Perfect for cordless drills (1000 2500 rpm)
- · Reinforced body with grub screw for better performance and rigidity, thus maintaining the wax on the tip of the drill.
- · High quality finish.

	REF	RPM		
DRYGRES DRILL BITS 4DRILL Ø 1/4" [6 MM.]	TBD	1000 min.	1 7/16"	1
DRYGRES DRILL BITS 4DRILL Ø 5/16" (8 MM.)	TBD	1000 min.	1 7/16"	1
DRYGRES DRILL BITS 4DRILL Ø 3/8" (10 MM.)	TBD	1000 min.	1 7/16"	1
DRYGRES DRILL BITS 4DRILL Ø 1/2" [12 MM.]	TBD	1000 min.	1 9/16"	1
DRYGRES DRILL BITS 4DRILL Ø 9/16" (14 MM.)	TBD	1000 min.	1 9/16"	1
DRYGRES DRILL BITS 4DRILL Ø 3/4" (20 MM.)	TBD	1000 min.	1 9/16"	1

Kit DRYGRES 4DRILL







- · For dry drilling in porcelain tile, Suitable for other ceramic materials, natural stone and artificial stone.
- · Hexagonal connection Compatible with battery drills.
- · Kit composed of:
- DRYGRES 4DRILL diamond drills dry cut 0 6, 8, 10 and 12 mm.
- · With case.

	REF	RPM	
KIT DRYGRES 4DRILL	TBD	1000 min.	1



























MULTIDRILL guide









By fixing with suction cup, allows horizontal and vertical holes in the right place, preventing the drill bit from slipping.
 Compatible with dry cutting diamond drill bits, removable diamond drill bits 0 1/4" to 9/16" (6-14 mm.) and wet cutting diamond drill bits 0 13/16" to 3" (20-75 mm.).

	REF	
MULTIDRILL GUIDE	51921	1



- · Bottle of 1200 ml. volume, with manual pressure pump.
- · Includes 2 m. hose.

	REF	
TANK AND HOSE FOR MULTIDRILL GUIDE	50947	1

Electric drill adapter









- \cdot Chuck attachable to RUBIMIX–9 and 9 PLUS to work with hexagonal and round finishing rods below 12mm. [½"]
- · Includes chuck key S2 Ref. 71969.

	REF	
СНИСК	71967	1



- \cdot For the use of dry cutting diamond drill bit with electric drill. \lceil M14 \rceil
- · Use without hammer.

	REF	
M14 ADAPTER FOR ELECTRIC DRILL	05976	1









- · Steel plate special high wear resistance with corrosion protection by clear
- · Ergonomic RUBIFLEX handle with two textures.
- · Perfect flatness of the plate.

	REF		111	H.		
STEEL NOTCHED TROWEL 1/8"X1/8" (3X3 MM.)	76961	1/8"	1/8"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 3/16"X3/16" (4.5X4.5 MM.)	76965	3/16"	3/16"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X1/4" (6X6 MM.)	76962	1/4"	1/4"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X13/32" (6X10 MM.)	76966	1/4"	3/8"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 3/8"X3/8" (8X8 MM.)	76963	5/16"	5/16"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 13/32"X13/32" (10X10 MM.)	72909	3/8"	3/8"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) 1/2"X1/2" (12X12 MM.)	76967	1/2"	1/2"	0"	6	270
STEEL NOTCHED TROWEL 11" (28 CM.) R-13/32" (10 MM.)	76964	0"	0"	3/8"	6	270
STEEL NOTCHED TROWEL TRIANGULAR 1/4"X7/32" (6X5 MM.)	72911	1/4"	3/16"	3/16"	6	270
STEEL NOTCHED TROWEL 28 CM. YW	72949	1/4 / 1/2"	5/16 / 1/4"	0"	6	270



- · Tile adhesive (thin-set) application.
- · Aluminum structure. Light and resistant. Bi-material handle RUBIFLEX. Improves ergonomics. Stainless steel plate.
- · Plate's fixation by 6 electro welded points. Irremovable and maximum mechanical resistance.

	REF	
PRO STAINLESS STEEL FLAT TROWEL	76950	6
PRO STAINLESS STEEL 1/8" X 1/8" TROWEL	76951	6
PRO STAINLESS STEEL 1/4" X 1/4" TROWEL	76952	6
PRO STAINLESS STEEL 5/16"X 5/16" TROWEL	76953	6
PRO STAINLESS STEEL 3/8" X 3/8" TROWEL	76954	6
PRO STAINLESS STEEL 1/2" X 1/2" TROWEL	76955	6


























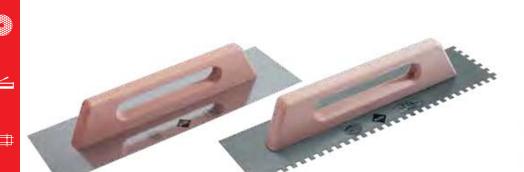



- · Steel plate special high wear resistance, corrosion-protected by clear coat (STEEL).
- · Stainless steel plate special high wear resistance (INOX)
- · Perfect flatness of the plate.
- The notches 13/16" x 13/16" (20 x 20 mm.) developed for dosing of glue mortar on uneven floors. Allows more material thickness.

	REF	H	111	- He		
STEEL TROWEL 19" [48 CM.]	65988	0"	0"	0"	6	312
STEEL NOTCHED TROWEL 19" (48 CM.) 1/4" X 1/4" (6 X 6 MM.)	65958	1/4"	1/4"	0"	6	312
STEEL NOTCHED TROWEL 19" (48 CM.) 3/8" X 3/8" (8 X 8 MM.)	65959	5/16"	5/16"	0"	6	312
STEEL NOTCHED TROWEL 19" (48 CM.) 13/32" X 13/32" (10 X 10 MM.)	65983	3/8"	3/8"	0"	6	312
STEEL NOTCHED TROWEL 19" (48 CM.) 1/2" X 1/2" (12 X 12 MM.)	73973	1/2"	1/2"	0"	6	312
STEEL NOTCHED TROWEL 19" (48 CM.) 13/16" X 13/16" (20 X 20 MM.)	75962	13/16"	13/16"	0"	6	312

- · Double stainless steel for corrosion resistance.
- · Spread more adhesive with each pass.
- · Ideal for tile with an edge 15" and large.

REF	- H	J-JH	T.	111	
26976	1/2"		1/2"	1/2"	6
26977	-	1/4"	1/2"	1/4"	6
26978	1/4"	-	3/8"	1/4"	6
26979	1/4"	-	1/4"	1/4"	6
	26976 26977 26978	26976 1/2" 26977 - 26978 1/4"	26976 1/2" 26977 - 1/4" 26978 1/4" -	26976 1/2" 1/2" 26977 - 1/4" 1/2" 26978 1/4" - 3/8"	26976 1/2" 1/2" 1/2" 26977 - 1/4" 1/2" 1/4" 26978 1/4" - 3/8" 1/4"



XX

Bucket Trowel PFP05



PRO HEAVY DUTY SCRAPER 5"





##

××



· Ergonomic RUBIFLEX.

	REF	28	L	Å	
PFP05-180 MM. (7 1/16")	75418	7"	4 1/8"	0.628 Lb	6
PFP05-200 MM. (77/8")	75420	8"	4 5/16"	0.703 Lb	6



- · To remove old coverings (ceramic tiles, wallpaper, vinyl tiles, carpets, paint, etc..)
- · Ideal for repair jobs (substitution of broken tiles) and renovations.

	REF	
PRO HEAVY DUTY SCRAPER 5"	66953	1
5 BLADES FOR PRO HEAVY DUTY SCRAPER 5"	66954	1

Bucket Trowel PFP19



Margin **Trowel PFP33**





White rubber Superpro mallet





· Ergonomic RUBIFLEX

	REF	28	L	Å	
PFP19- 80 MM. [4 5/16"]	76808	4 5/16"	3"	0.335 Lb	6
PFP19- 90 MM. (5 1/16")	76809	5 1/16"	3 9/16"	0.37 Lb	6



· Ergonomic RUBIFLEX handle

	REF	28	L	\triangle	
PFP33 (6 11/16" X 1 15/16")	79050	6 11/16"	1 15/16"	0.34 Lb	6



- · Ergonomic handle with two electroplated tungsten carbide plates with high resistance to abrasion.
- · Useable with 1, 2 or 3 plates depending on width of the joint.
- · Supplied in blister.

	REF		
JOINT SCRAPER	65907	5	600
SPARE JOINT SCRAPER	71974	10	4600



- · WHITE RUBBER MALLET flat/rounded 18oz
- · Non-marring head makes this tool ideal for working with finished surfaces.

	REF	
WHITE RUBBER MALLET 18 OZ	66906	6





RUBISCRAPER-250



RUBI

Electric grout scraper For grout removal without damaging the tile.



- Ergonomic design and bi-material finishing, for greater comfort and better stability.
- 2 Light and resistant. Maximum reliability.
- Blades made in tungsten carbide.

 Resharpenable for a greater performance.

 Patented model.
- 4 Fast locking / unlocking system for easy assembly of blade.
- · Ideal for repair work (replacement of broken tiles).
- Equipped with 3 speeds. V1: 6500 i.p. / V2: 8000 i.p. / V3: 9500 i.p.
- · Power: 250 W.
- · Stroke length: 2 mm.
- · Double insulation.
- · Blades for joints of 1.5 mm (ref. 66810, use only with speed 1) and 3 mm (ref. 66812) included.
- · Includes 2 special blades (steel made) to remove rests of thinset from the back of the tiles or on the substrate.
- · With transport case.
- · Interchangeable blades for 1.5,2,3 and 4 mm joints.











	REF	5	W	
RUBISCRAPER-250 USA	66942	120V-60Hz	250	1
1.5 mm (1/16") blade	66810			1
3 mm (1/8") blade	66812			1





XX

Nippers for Porcelain Tiles









- · Specially for cutting narrow strips of a maximum of 7/16"
- · [1cm.].
- · Replaceable scoring wheels (Ref:01953).
- · Equipped with tungsten carbide scoring wheels with titanium surface treatment to last longer. With a gentle turn, the scoring wheels can be repositioned when they start getting worn.

	REF		
NIPPERS FOR PORCELAIN TILES	83942	5	765

Nippers for ceramic tiles Superp







(o)

##

××



- · Ideal for wet or abrasives tasks.
- · For minimal risks only.
- · Made of 100% latex.
- · Conforms to EN420.

	REF	
LATEX GLOVES	20907	12

· Tungsten carbide edge of great hardness.

· To rectify cuts of ceramics.

	REF	
NIPPERS FOR CERAMIC TILES	65926	6

Shape Template









- · Helps colaps and settle thin set ridges under tile.
- · Waterproof and high wear resistance wood.
- · Perfect flatness.
- · Dimensions: 15 3/4" x 5 3/4" (40x14,5 cm.)
- · With white natural rubber sheet to prevent damage to the

3161		
	REF	
TILE BEATING BLOCK 40 X 14,5 CM. WITH RUBBER	72980	1

Construction pencil





- · Specially designed for writing on wet or glazed surfaces like ceramic tile, marble, granite, etc.
- · Set of 2 construction pencils supplied in blister.

	REF		
CONSTRUCTION PENCIL	65942	50	450







	REF	
SHAPE TEMPLATE	70925	10

Caulk gun 9 inch



- · Dripless heavy duty 10 Oz. caulk gun.
- · Thrust Ratio (12:1)

 \odot

##

Ŀ

XX

	REF	
CAULK GUN 9 INCH	66992	6

Rule support set





· For easy adjustment and levelling of the rule for wall tiling. · In box of 2 units.

	REF		
RULE SUPPORT SET 20" (50 CM.)	60998	1	

Manual grout mortar applicator



- · Great capacity (650 cc) grout mortat applicator.
- · Very light structure made of aluminum.
- · Replaceable and adjustable nozzles to the joint width.
- · Also usable for the application of silicone and PU rigid and flexible cartridges. Quick and clean application.

	REF	
MANUAL GROUT MORTAR APPLICATOR 650 CC.	65990	1
SET OF SPARE PADS FOR GROUT MORTAR APPLICATOR(INCLUDES SCREW, PISTON AND 3 NOZZLES)	65981	1
SPARE NOZZLES FOR GROUT MORTAR APPLICATOR [INCLUDES 6 NOZZLES]	65980	1

RubiLevel Antishock





- · Double machining to ensure a constant precision in the top face and the base.
- · Accuracy: 0,5 mm/m.
- · Three bubbles for checking horizontal, vertical and and 45° levels.
- · Double and ergonomic bi-material handle.
- · Rubber protector at the ends.
- DUAL view vertical vial for front measurements. Eliminates parallax error.
- · MAGNIFIED horizontal vial for the CLEAREST view of the bubble.

	REF		
RUBILEVEL ANTISHOCK 24" (60 CM.)	76932	8	672
RUBILEVEL ANTISHOCK 32" (80 CM.)	76933	8	504
RUBILEVEL ANTISHOCK 40" (100 CM.)	76934	8	392
RUBILEVEL ANTISHOCK 48" (120 CM.)	76935	8	392



- · 4 uses in 1: Work bench, scaffold, dolly and creeper.
- · Foldable, easy to transport and storage.
- · Double sided board: MDF wood side (work bench function) and non-slippery PP plastic side (rest of functions). EASY interchangeable.
- · Reinforced stainless steel area for harder jobs. Avoids damages on wooden surface.
- · Angle conveyor and rule printed on the wooden side. also includes a hole for small drillings (max. 25 mm) and hand tools insterts on metal frame.
- · Folded table: 31 1/2"x20 1/2"x5" [80x52x12,5cm].
- · Unfolded table: 45 1/4"x20 1/2"x31 1/2" (115x52x80cm).

	•		,
	REF		
FOLDING 4-IN-1 WORKING TABLE	66924	1	16

Replaceable Grout Float PRO



Grout Floats Superpro Wood



Grout Floats Superpro Plastic





- · Grout Float (Ref.84924) with sheet resistant to abrasion.
- · Replaceable with spare (ref. 84925).

	REF	
SPARE GROUT FLOAT PRO	84925	15
REPLACEABLE GROUT FLOAT PRO	84924	6



- · Wood ergonomic handle.
- · Available in different hardnesses of rubber for best finish as the joint width.
- · Rubber float trowel, with white rubber sheet wear resistant.
- · Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF		
SOLID RUBBER GROUT FLOAT SUPERPRO	65975	6	540



- · Plastic ergonomic handle.
- · Available in different hardnesses of rubber for best finish as the joint width.
- · Rubber float trowel, with white rubber sheet wear resistant.
- · Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF		
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65973	6	540
SOLID RUBBER GROUT FLOAT SUPERPRO	65972	6	540

Grout Floats PRO



Flexible plaster floats









- · Black foam rubber.
- · Grout Float PRO 9"x4" 22.5x10cm.[Ref.84926], with white rubber sheet wear resistant.

	REF		
RUBBER GROUT FLOAT 9"X4"X19/32" (22,5X10X1,5CM)	84926	6	384



- · For multi finish and skimming plaster jobs (also compatible with microcement).
- · Ideal for vertical jobs in heights.
- · 1,2 mm thick polypropylene (PP) plate.

	REF	
FLEXIBLE FINE PLASTIC HANDLE FLOAT	71904	6



- · Plastic ergonomic handle.
- · Available in different hardnesses of rubber for best finish as the joint width.
- · Rubber float trowel, with white rubber sheet wear resistant.
- · Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF		
RUBBER GROUT FLOAT SUPERPRO	65971	6	540



(o)





















Tile spacers 1/32" [1mm]



- · For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF		
TILE SPACERS 1/32" (1 MM.) - (B-300 U.)	02911	10	1200

Tile Spacer 1/16" (1.5mm)





- · For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF		
TILE SPACERS 1/16" (1.5 MM.) - (B-300 U.)	26991	10	960
TILE SPACERS 1/16" - (1000 PC.) JAR	02280	1	

Tile Spacer 3/32" (2mm)





- · For wall & floor tiles with minimum joint.
- · Quality base material, without impurities or imperfections.

	REF		
TILE SPACERS 3/32" (2 MM.) - (B-300 U.)	02901	10	1680

Tile Spacers 1/8" [3mm]







- · For floor tiles with thin joint.
- · Quality base material, without impurities or imperfections.

	REF		
TILE SPACERS 1/8" (3 MM.) -(B-200 U.)	26990	10	1200
TILE SPACERS 1/8" - (1000 PC. JAR)	02281	1	

Tile Spacers 3/16" (5mm)



- · For floor tiles.
- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF		
TILE SPACERS 3/16" (5 MM.) -(B-100 U.)	26989	10	960
TILE SPACERS 3/16" - (400 PC. JAR)	02282	1	

Tile Spacers 1/4" (6mm)





- · For floor tiles.
- · Quality base material, without impurities or imperfections.
- · Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout

	REF		
TILE SPACERS 1/4" (6 MM.) - (B-100 U.)	02036	10	540

 \odot

##

i

T-spacers 1/32" (1mm)



T-spacers 1/16" [1.5mm]



T-spacers 1/8" [3mm]



















- · Ideal for "Brick Bond" and perimeter joints.
- · Quality base material without impurities or imperfections.

	REF		
T-SPACERS 1/32" (1MM) (B-300 UN.)	02859	10	
T-SPACERS 1/32" (1MM) (B-1000 UN.)	02862	1	720

- · Ideal for "Brick Bond" and perimeter joints.
- · Quality base material without impurities or imperfections.

	REF	
T-SPACERS 1/16" (1.5MM) (B-300 UN.)	26988	10
T FOR GROUTS 1/16" (1.5MM) (JAR-1000 UN.) USA	02715	1

- \cdot ldeal for "brick style" tiling and perimeters.
- · Quality base material, without impurities or imperfections.

	REF		
T-SPACERS 1/8" (3 MM.) -(B-200 U.)	26986	10	1680
T-SPACERS 1/8" (3 MM.) -(B-1000 U.)	02063	1	
"T" SPACERS 1/8" -(JAR-1000 U.)	02399	1	

T-spacers 3/16" (5mm)

















- \cdot Ideal for "brick style" tiling and perimeters.
- \cdot Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.

	REF		
T-SPACERS 3/16" (5 MM.) -(B-100 U.)	26987	10	2040
"T" SPACERS 3/16" -(JAR-400 U.)	02398	1	







- · Wedges for tiling.
- · Quality base material, without impurities or imperfections.

	REF		
WEDGES 3/16" (5 MM.)-(B-500 U.)	02950	10	1500
WEDGES 3/16" (5MM.)-(JAR-500 PCS.)	02283	1	



- · For Rectify the position of the pieces during installation.
- Thanks to their geometry, horseshoe shaped, these spacers can be combined together to give the same function as a traditional crosshead or "T".

	REF	
SPACER HORSESHOE 1/16" (300 UN) JAR	13841	10
SPACER HORSESHOE 1/8" (250 UN) JAR	13840	10







































CYCLONE LEVEL SYSTEM



· System to facilitate the laying of large format tiles, avoid lippage and improving finishing.















- \cdot A tool is not required for their installation.
- \cdot EASY, QUICK and INTUITIVE to USE. Results less dependent on the skill and experience of the user.
- \cdot LARGE and ERGONOMIC Cap. Does not injure fingers when tightening.
- · GUARANTEES the flatness and uniformity of the installation surface.
- · System removal by IMPACT (kick or mallet). ALWAYS in the direction of the grout joint.
- · Reusable caps.
- \cdot The base of the clip ensures continuous tension between the clip and the cap.
- · The lateral grooves at the base of the clip FACILITATE the spread of the adhesive, thus improving the adhesion of the tile.
- · Tightening adjustment system depending on the thickness of the ceramic tile.
- · Recommended for tiles with thicknesses from 3 to 18 mm.







- Flat base clips of 1/32", 1/16", 3/32" and 1/8" (1, 1.5, 2 and 3
- Visual thickness identification by color

· Visual thickness identification by color.			
	REF		
CYCLONE L.S. 1/32" (1 MM) FLAT BASE (B-100)	35937	36	-
CYCLONE L.S. 1/32" (1 MM)FLAT BASE (B-300)	35938	12	-
CYCLONE L.S. 1/32" (1 MM) FLAT BASE (B-2400)	35939	1	-
CYCLONE L.S. 1/16" (1,5 MM) FLAT BASE (B-100)	35940	36	-
CYCLONE L.S. 1/16" (1,5 MM) FLAT BASE (B-300)	35941	12	-
CYCLONE L.S. 1/16" (1,5 MM) FLAT BASE (B-2400)	35942	1	-
CYCLONE L.S. 3/32" (2 MM) FLAT BASE (B-100)	35943	36	-
CYCLONE L.S. 3/32" (2 MM) FLAT BASE (B-300)	35944	12	-
CYCLONE L.S. 3/32" (2 MM) FLAT BASE (C-2400)	35945	1	-
CYCLONE L.S. 1/8" (3 MM) FLAT BASE (B-100)	35946	36	-
CYCLONE L.S. 1/8" (3 MM) FLAT BASE (B-300)	35947	12	-
CYCLONE L.S. 1/8" (3 MM) FLAT BASE (C-2400)	35948	1	-



- · Available in various models:
- \cdot Cross base clips of 1/16" and 1/8" (1.5 and 3 mm).
- · Visual thickness identification by color.

	REF		
CYCLONE L.S. 1/16" (1,5 MM) CROSS BASE (B-100)	35952	36	-
CYCLONE L.S. 1/16" (1,5 MM) CROSS BASE (B-300)	35953	12	-
CYCLONE L.S. 1/16" (1,5 MM) CROSS BASE (B-2400)	35954	1	-
CYCLONE L.S. 1/8" (3 MM) CROSS BASE (B-100)	35955	36	-
CYCLONE L.S. 1/8" (3 MM) CROSS BASE (B-300)	35956	12	-
CYCLONE L.S. 1/8" (3 MM) CROSS BASE (B-2400)	35957	1	-



- The kit consists of 300 clips and 100 reusable caps.
- Packaged in a practical bucket.

r dended in a practical backet.			
	REF		
KIT CYCLONE 1/16" (1,5 MM)	35964	3	-
KIT CYCLONE 1/8" (3 MM)	35965	3	-

Cyclone Caps









- · Reusable.
- · Special 6 mm external thread.
- · Ergonomic detail for better force concentration.
- · Crowned area for better grip.
- · Dimensions: 2-3/8" x 2-3/8" x 1-1/2" (59x59x38 mm)
- · Supplied in reusable container.

	REF		
CYCLONE CAPS (B-100)	35949	5	-
CYCLONE CAPS (B-300)	35950	4	-
CYCLONE CAPS (B-1200)	35951	1	-



























Delta Level System Clip





#

i

XX



RUBI



- The kit consists of 1 pliers, 100 Clips and 100 reusable wedges.
- · Packaged in a handy bucket.

	REF		
KIT DELTA LEVEL SYSTEM 1MM (3-12MM)	03913	1	80
KIT DELTA LEVEL SYSTEM 1,5MM (3-12MM)	03914	1	80

CONSUMPTION -EXTRA-LARGE FORMATS inch 12"x12" 16"x16" 18"x18" 20"x20" 24"x24" 30"x30" 32"x32" 36"x36" 40"x40" 48"x48" 40"x60" 40"x120" 48"x48" 48"x142" 60"x60" 60"x120" RECTANGULAR FORMATS inch 6"x24" 6"x35" 6"x48" 9"x16" 9"x24" 9"x30" 9"x40" 12"x40" 12"x24" 12"x36" 12"x48" 16"x32" 16"x48" 18"x36"


Delta Level System Pliers Fast-Fix











- · Made of steel with bi-material Soft-grip handles for greater
- · Protective cover on the pressure cam to avoid damaging the tile.

	REF	
DELTA LEVEL SYSTEM PLIERS FAST-FIX	03901	6



· Reusable.

	REF		
DELTA LEVEL SYSTEM WEDGE (B-200 UN)	02844	13	104
DELTA LEVEL SYSTEM WEDGE (B-400 UN)	02845	6	48
DELTA LEVEL SYSTEM WEDGE (B-1200 UN)	02857	1	16









3/32" (2 MM)

- · Made in Polypropylene.
- · Different clip sizes available:
- Clip 1/32" (1 mm) 1/16" (1.5 mm) and 3/32" (2 mm). for tiles from 1/8" (3mm) to1/2" (12 mm) thick.
- \cdot 1/8" [3 mm] clip for tiles from 1/4" [6 mm] to 9/16"[15 mm]

UHEN.			
	REF		
200 clips 1/32" delta lev. sys (1/8"-1/2")	02851	21	168
400 clips 1/32" delta lev. sys (1/8"-1/2")	02839	13	96
2400 clips 1/32" delta lev. sys [1/8"-1/2"]	02870	1	16
200 clips 1/16" delta lev. sys (1/8"-1/2")	02841	21	168
400 clips 1/16" delta lev. sys (1/8"-1/2")	02842	13	96
2400 clips 1/16" delta lev. sys [1/8"-1/2"]	02855	1	16
200 clips 3/32" delta lev. sys (1/8"-1/2")	02853	24	192
400 clips 3/32" delta lev. sys (1/8"–1/2")	02854	13	96
2400 clips 3/32" delta lev. sys (1/8"-1/2")	02856	1	16
200 clips 1/8" delta lev. sys (1/4"-9/16")	02867	21	168
400 clips 1/8" delta lev. sys [1/4"–9/16"]	02868	11	96
2400 clips 1/8" delta lev. sys [1/4"–9/16"]	02869	1	16
100 clips 1/16" delta lev. sys [7/16"-7/8"]	02846	20	320
· ,			

Kit TILE LEVEL QUICK



TILE LEVEL QUICK Heavy **Duty Pliers**





(o)

##


Ċ

XX



· The set consists of pliers, 100 Straps and 100 reusable caps. Packaged in a handy bucket.

	REF		
KIT TILE LEVEL QUICK	02941	1	80

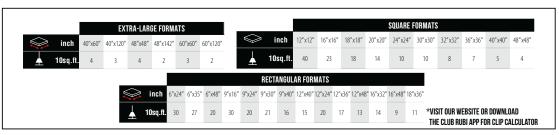



- · Metal version of the plastic TLQ pliers, fully compatible.
- · Made of zinc-plated carbon steel.
- · Ergonomic bi-material handle (plastic and rubber).
- · Height adjustment with regulation screw (no tools required).

	REF	
TILE LEVEL QUICK HEAVY DUTY NIPPER	03900	1

TILE LEVEL QUICK Straps












- · Doesn't need soaking before use.
- The Strap thickness guarantees minimum grout of 1/16" (1.5 mm).
- · Ensures continuous tension between Straps and caps.
- · Grooved bases to improve the wetting of ceramic tile.

	REF		
TILE LEVEL (B-100 U.) STRAP	02893	6	180
TILE LEVEL (B-400 U.) STRAP	02895	6	48



	REF		
TILE LEVEL CAPS (B-100 U.)	02890	10	300
TILE LEVEL CAPS (B-400 U.)	02892	8	64

TILE LEVEL QUICK Pliers





· Ergonomic design with bimaterial handle. Made of very light and resistant materials. Tighten regulation system depending on the thickness of the ceramic tile.

	REF		
TILE LEVEL QUICK PLIERS	02989	1	756







##


××



- \cdot The set consists of pliers, 100 Straps and 100 reusable caps.
- Packaged in a handy bucket.

	REF		
TILE LEVEL SET	02992	10	60



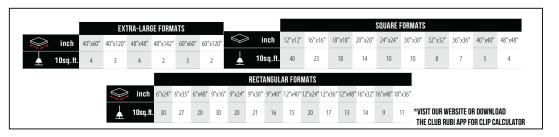

· Can be used for floor and wall tiles.

	REF	
TILE LEVEL PLIERS	02982	1

TILE LEVEL Straps



TILE LEVEL CAPS











- \cdot For tiles between 1/8" and 13/16" (3mm and 20mm).
- · Thick with a grout joint of at least 1/32" (0,75mm).

	. (-)	,	
	REF		
TILE LEVEL STRAPS (B-400 U.)	02949	6	48

· Can be reused up to 25 times.

	REF		
TILE LEVEL CAPS (B-400 U.)	02947	8	64



Rubber basket Espuerta Nº 2 (3 gal.)










- · Flexible. Ideal to carry with one hand.
- Polyamide reinforced with nylon fabric to increase tensile strength. At 30° C the tensile strength is 90 MPa, and elongation 45%.
- · Very thick handles. Increased resistance.
- · Rounded geometry handles. More comfort.

REF				Å		
88941	5 1/2"	14"	3 gal.	3.55 Lb	10	300



- · Embossed scale.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.

REF				$ rac{\circ}{}$		
88911	12"	12"	4 gal.	5.7 Lb	10	180

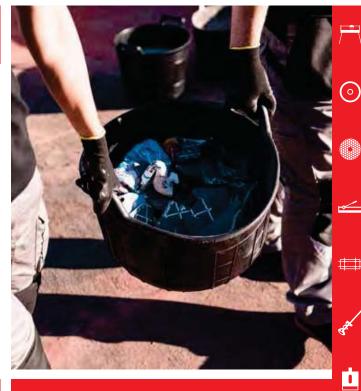

Rubber tray no. 3 "Rubtray" [6.34 gal.]



Rubber bucket "italiano" with handle (2.7 l.)







- Greater comfort during transport. For easy waste collection.
- · Plastic handle grip. Greater comfort.
- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.

REF	□;	Ü		Å		
88915	6 11/16"	13"	2.7 gal.	4.2 Lb	10	200



- · Highly resistant metal handle.
- · Walls are reinforced with ribbing.

			0		
REF				Å	
88827	15"	15 1/4"	7.9 gal.	7.4 Lb	10



- · Suitable for all types of construction industry professionals.
- · With reinforced rim for greater resistance.
- · Walls and base reinforced with ribbing.

REF	□;	Ü		ے		
88934	6 11/16"	24 1/4x18 1/8"	6.34 gal.	9.7 Lb	10	120

XX

Rubber basket "espuerta" no. 103 [15.8 gal.] RUBI





Plastic bucket model 2 "Lightbuck" (5.8 gal.)





- · Polyamide reinforced with nylon to increase tensile strength. At 30°C the tensile strength is 90 MPa, and elongation 45%.
- · Handles very thick. Increased resistance.

REF				Å		
88927	17 5/16"	21 5/8"	15.8 gal.	11.9 Lb	5	150

· Greater comfort during transport. For easy waste collection.

55 I.

3.5 Lb

20 7/8"



- · Rounded geometry handles. Comfort.
- · Wall with reinforcing ribs

REF	Ü	₩;		Å		
88906	14"	11 7/16"	4.8 gal.	6.06 Lb	10	150



- · Greater comfort during transport. Easy waste collection.
- · Heavy duty metal handle
- · Plastic handle. Comfort.

[10.5 gal.]

· Light.

REF				range		
88772	14 9/16"	10 5/8"	5.8 gal.	2 Lb	10	450

Plastic tub №. 3 "Flextub"

Plastic tub №. 4 "Flextub" [14.5 gal.]







- · Flexible. Perfect for carrying with one hand.
- · Ideal for mixing cements and mortars with portable electrical mixers.
- · Reinforced with polyamide nylon weave to increase the tensile strength. At 30° C the critical load is 90 MPa, and elongation at break is 45%.
- · Very thick handles. Greater resistance.

REF	□;	Ü		Å		
88804	13 3/8"	16"	8.7 gal.	5.18 Lb	10	120



- · Handles with a rounded shape. Greater comfort.



· Greater comfort during transport. For easy waste collection.

· Reinforced handles. Greater resistance.



##

1

××





· Lightweight.

REF

SR-1 ergonomic seat



Gel Duplex knee pads





- · Aluminum chassis high strength and stability.
- · Allows an ergonomic position of comfort.
- · Prevents injuries in knees and back.
- · Adjustable seat height and angle for optimum adaptation to each use. Robust construction with 7 heavy duty wheels.
- · Includes tray for tools and accessories.
- · Ideal for flooring, parquet installation, cleaning and other operations on pavements tasks. Replaceable ergonomic kneepads. Maximum weight: 286 lb. (130 kg.)

	0		0,	
		REF		
SR-1 ERGONOMIC SEAT		81999	1	18





- · Professional knee pads with ergonomic design. Highly comfortable.
- · Their design combines the use of hard materials to protect against impacts and uneven floors and soft materials adaptable to the user's anatomy on the inside.
- · Besides protecting the user's knees thanks to the silicone gel in their inside, their studied ergonomics gives them great stability, preventing ligaments and tendons fatigue.
- · Wide range of uses thanks to their design " two in one ":
- · Can be used together with the external rubber protection of great stability and resistance.
- · With the main body only, less bulky, which allows the knee to slide without problem over smooth surfaces.
- · They incorporate a double fastener, inferior and superior, easy adjustable.
- · Conforms to EN14404.
- · Protection level: 1

	REF		
GEL DUPLEX KNEE PADS	81989	6	96

Professional Knee Pads N







- · Professional knee pads of great comfort.
- · Made of absorbent material to protect against knocks and bumps of the ground.
- · Its internal design is perfectly adaptable to the user's knee.
- · Big leaning surface for optimum stability.
- · Adjustable superior fastener...

	REF		
PROFESSIONAL KNEE PADS	65915	6	192







- · Ergonomic design professional and high comfort knee pads.
- · Its design combines the use of hard materials against impacts and uneven floors and soft materials therein, adapted to the user's anatomy.
- · In addition to protecting the user's knees through the use of silicone gel inside, its studied ergonomics provide them with great stability, preventing ligaments and tendons fatigue.
- · They incorporate two bands Neoprene closure.
- · Conforms to EN14404.
- · Protection level: 1

	REF		
GEL COMFORT KNEE PADS	81998	6	96































RUBICLEAN TRIPLE SUPERPRO

















XX

i













- · Plastic washboy, lightweight and high resistance.
- · Equipped with 3 spiral rollers for further draining.
- · Includes wheels and carrying handle.
- · Capacity: 5.3 gl. [24 l.]
- · Useful capacity: 2.2 gl. (10 l.)
- Dimensions: 20 7/8" x 11 1/32" x 14 9/16" (53 x 28 x 37 cm.)
- · Supplied assembled and in 1 unit box.

	REF		
RUBICLEAN TRIPLE SUPERPRO WASHBOY	21995	1	18



- · Composed by:
- · Rubiclean Eco (Ref. 24948), Sponge standard (Ref. 24966), Rubber Trowel for Joints (Ref. 24969) and High absorption sponge plus with handle (Ref. 84927).
- · Capacity: 5.2 gl. (20 l.)

	REF	
RUBICLEAN ECO KIT	68910	1



- · Polyurethane foam floats with high absorption.
- The PLUS model has slits for increased performance drag dirt.

	REF	\Diamond	6			
SPONGE FLOAT PRO PLUS	84927 11	1/16x5 1/2x1 3/16"	3	3	10	240

Replaceable Superpro Sponges 12" x 5 11/32" (30x13,5cm)





	REF			6	6
FLOAT WITH REPLACEABLE SUPERPRO SPONGE	22900	12x5 5/16x1 9/16"	1	2	10
FLOAT WITH REPLACEABLE	77016	17v5 5/16v1 0/16"	z	z	11

· PLUS models have cuts for increased drag on the dirt.

		, , , ,	$\overline{\Delta}$	9		7
FLOAT WITH REPLACEABLE SUPERPRO SPONGE	22900	12x5 5/16x1 9/16"	1	2	10	180
FLOAT WITH REPLACEABLE SWEEPEX SUPERPRO SPONGE	22916	12x5 5/16x1 9/16"	3	3	10	180
REPLACEABLE SUPERPRO SPONGE	22910	12x5 5/16x1 9/16"	1	2	10	320
REPLACEABLE SUPERPRO SPONGE PLUS	22918	12x5 5/16x1 9/16"	1	2	10	320
REPLACEABLE EPOXY CELLULOSE SUPERPRO SPONGE	22932	12x5 5/16x1 3/16"	4	4	10	
REPLACEABLE SWEEPEX SUPERPRO SPONGE	22922	12x5 5/16x1 3/16"	3	3	10	320
REPLACEABLE SWEEPEX SUPERPRO SPONGE PLUS	22914	12x5 5/16x1 9/16"	3	3	10	320

Sponge Float SUPERPRO





- · Floats with SUPERPRO sponge for grout cleaning and finishing.
- · PLUS model has cuts for increZased performance in wiping away dirt.

	REF			6		
SPONGE FLOAT SUPERPRO PLUS	20908	11 1/16x7 11/16x1"	1	2	10	180

Float with 10" (25 cm.) SUPERPRO pads











- · To clean ceramic surfaces and other materials.
- · Float with three different roughness replaceable pads; soft [red], medium (blue) and hard (brown).
- · Float with three very stuff pads (white).
- · 3 sets of pads: very soft (white), soft (red), medium (blue) and hard
- · Available set of 3 pads of different roughness: soft (red), medium (blue) and hard (brown).

	REF		
FLOAT + 3 MIXED PADS	20900	10x4x1"	1
3 PADS REPLACEMENT SET - MEDIUM	20973	10x4x1"	1
3 PADS REPLACEMENT SET - HARD	20974	10x4x1"	1
3 PADS REPLACEMENT SET - SOFT/MEDIUM/HARD	20902	10x4x1"	1



- · Convenient box with 2 bags x 30 Hidro Rounded Sponge vacuum packaged. Not individually packed.
- · Polyurethane sponges.
- · HIDRO models are highly absorbent.
- · Extra large all purpose sponge.

	REF	
HIDRO ROUNDED SPONGE VACUUM PACKAGED (60UN)	68999	60

SUPERPRO sponges









- · PLUS models have cuts for increased drag on the dirt.
- · Ref. 20905 and 20906 available in Palbox.

	REF			6		
SUPERPRO SPONGE	20905	8x5 1/8x2 3/4"	1	2	24	384
MIXED SUPERPRO SPONGE	20906	8x5 1/8x2 3/4"	4	2	24	288
EPOXY CELLULOSE SUPERPRO SPONGE	22928	6 11/16x4x1 9/16"	4	4	12	792
STANDARD PRO SPONGE	24966	6 11/16x4x2 3/4"	2	1	24	720







- · Mixed Rounded Sponge vacuum packaged 30 units, not individually packed.
- · Polyurethane sponges.
- · Mixed models : heavy duty grouting and haze buffer sponges.

	REF	
MIXED ROUNDED SPONGE VACUUM PACKAGED (30UN)	68997	30

























RUBI

KIT TILE LEVEL QUICK PALBOX







- ·Contains 16 Kits TILE-LEVEL QUICK (Ref. 02941)
- ·It Includes LCD screen with demo video.
- ·Dimensions: 23 5/8 x 15 3/4 x 47 1/4 [60 x 40 x 120 cm].

	REF	
TILE-LEVEL PALBOX WITH SCREEN (16 KITS)	02998	1



Delta Palbox



- · Ready to use by just removing the cover.
- · It contains:
- · 20 DELTA Leveling System kits.
- · Measurements: 23 5/8 x 15 3/4 x 41 5/16 (60 x 40 x 105 cm).

	REF	
DELTA LEVELING SYSTEM 1/32" (1MM) PAL BOX (20 UN.)	03917	1
DELTA LEVELING SYSTEM 1/6" (1,5MM) PAL BOX (20 UN.)	03918	1



- ·Sponges provides individually packed and with cardboard display. Polyurethane sponges.
- · HIDRO models are highly absorbent.
- · Extra large all purpose sponge.

	REF	
XL HIDRO ROUND SPONGE-DISPLAY [22 1/2"X 20 3/16"X 23 5/8"]	68995	120



XX

Mixed Rounded Sponge-Display

Superpro Sponge

Cardboard general display.



- ·Sponges provides individually packed and with cardboard display. Polyurethane sponges.
- · Mixed models : heavy duty grouting and haze buffer sponges.

	REF	
MIXED ROUND SPONGE-DISPLAY (22 1/2"X 20 3/16"X 23 5/8")	68996	120



- · Contains x135 units of ref. 20905.
- · Dimensions: 23" x 15" x 47" (60 x 40 x 120 cm.).

	REF		
SUPERPRO SPONGE PALBOX	69955	1	4



- · Cardboard general display.
- Dimensions: 55 1/8 (1.40 m) high, 16 1/8 (41 cm) wide, 12 5/8 [32 cm] deep.

	REF	
CARDBOARD GENERAL DISPLAY	91905	1



























(o)

XX

General Display Stand

Display for Manual Tile Cutters

Display for Rubi mixers





· Trays and shelves are optional.

· Irays and sileives are optional.		
	REF	
GENERAL DISPLAY 40" X 89" (100CM X 225CM)	90811	1
GENERAL DISPLAY 25" X 89" (65CM X 225CM)	90812	1
GENERAL DISPLAY 40" X 89" (100CM X 40CM) SHELF	90570	1
GENERAL DISPLAY 25" X 89" (65CM X 40CM) SHELF	90571	1
SHORT HOOK FOR GENERAL DISPLAY	90681	1
SET 2 DISPLAY BARS	90810	1
GENERAL DISPLAY 40" (100 CM.) TRAY	90606	1
GENERAL DISPLAY 25" (65 CM.) TRAY	90607	1
PRICE HOLDER HOOK	90656	1
PRICE HOLDER HOOK LABEL	90709	1



· Capacity to display 3 manual tile cutters.

	REF		
DISPLAY FOR MANUAL CUTTERS.	90305	1	6



 Display stand to hold two mixers and various mixing paddles.

	REF	
DISPLAY FOR MIXERS	90301	1





































RUBI CLUB APP






rubi.com










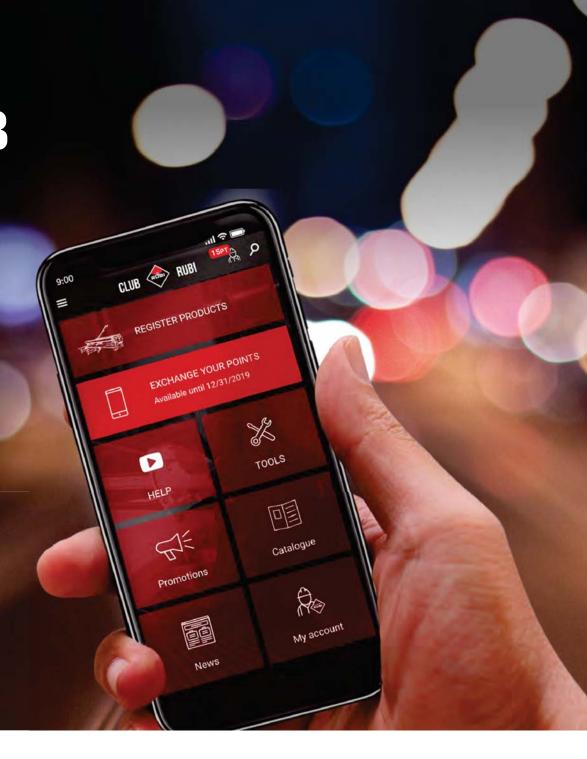

SYMBOLOGY

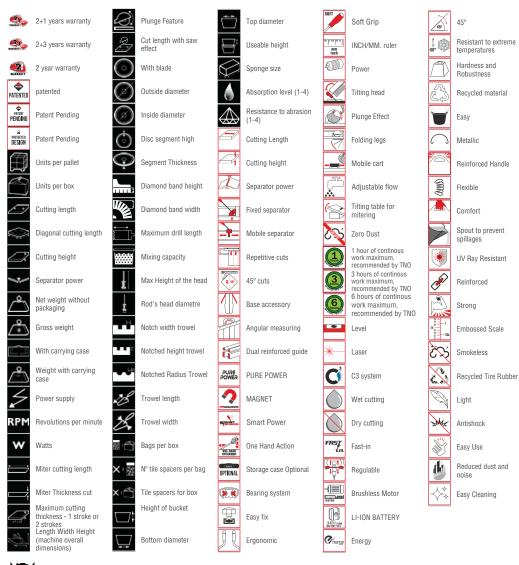



^{*} The gross weight of some electrical machines can vary depending on the type of pallet and carton type used in packaging.

^{**} Any manipulation of the machines voids the warranty. The warranty covers defects in manufacturing or assembly in accordance with applicable law.







RUBICLUB

ONLY FOR PROFESSIONAL TILERS



FREE EXTENDED WARRANTY



TURN YOUR TOOLS INTO MONEY



EXCLUSIVE PROMOTIONS AND NEWS



FREE PASSES TO TRADE EXHIBITIONS AND EVENTS





RUBI PRODUCTS CERTIFIED TRAINING



EXCLUSIVE CONTESTS AND DRAWS FOR MEMBERS

RUBI TOOLS USA Inc.

USA

3980 W 104th Street Suite 6 Hialeah, FLORIDA 33018 USA P. 1 305 715 9892 F. 1 786 359 4193

rubitools.usa@rubi.com

PROUD MEMBER OF:







rubi.com









